

Foundation Plan
Scale: 1/4" = 1'-0"

FOUNDATION CODED NOTES
(FOUNDATION PLAN ONLY)
(ALL NOTES NOT APPLICABLE TO ALL SHEETS/UNIT TYPES)

1. POURED CONCRETE FOUNDATION STEM WALL (TYPICAL) - SEE WALL SECTIONS SHEETS.
2. 12" WIDE CONCRETE FOOTINGS WITH STEEL BAR REINFORCING AS REQUIRED BY SOILS ENGINEER - MAINTAIN BOTTOM OF FOOTING A MINIMUM 30" BELOW FINISH GRADE AND TOP OF FOOTING SET 12" BELOW FINISHED FLOOR - TYPICAL.
3. PROVIDE MIN. 2 ANCHOR BOLTS EACH SIDE OF GARAGE DOORS.
4. SAW CUT CONTROL JOINT IN CONCRETE SLAB, 1/8" WIDE x 1/4" DEEP - TYPICAL.
5. 4" GLASS FIBER REINFORCED CONCRETE FLOOR SLAB OVER 6 MIL. POLYETHYLENE VAPOR BARRIER AND 4" GRAVEL BASE - TYPICAL.
6. 4" GLASS FIBER REINFORCED CONCRETE FLOOR SLAB OVER 4" GRAVEL BASE.
7. PROVIDE WEATHERLIP @ GARAGE DOOR OPENING - SEE DETAIL D, SHEET A.301.
8. PIPE LOCATION CENTERED ON WALL ABOVE.
9. NO STEM WALL AT GARAGE DOOR OPENINGS.
10. WASHER ALWAYS LOCATED LEFT OF DRYER. OPTIONAL UTILITY SINK ALWAYS LOCATED LEFT OF WASHER.
11. ELECTRICAL CONDUIT UNDER SLAB FOR ELECTRICAL OUTLET AT KITCHEN ISLAND.
12. ELECTRICAL CONDUIT SLAB PENETRATION.
13. 24" SQUARE CONCRETE FOOTING WITH STEEL BAR REINFORCING AS REQUIRED BY SOILS ENGINEER - MAINTAIN BOTTOM OF FOOTING A MINIMUM 30" BELOW FINISH GRADE AND TOP OF FOOTING SET 12" BELOW FINISHED FLOOR.
14. DASHED LINES INDICATE LOCATION OF PLUMBING FIXTURES ABOVE - SHOWN FOR REFERENCE ONLY.
15. 10" WIDE x 10" DEEP CONCRETE PIER WITH 24" DIA. FOOTING. MAINTAIN BOTTOM OF FOOTING A MINIMUM 30" BELOW FINISH GRADE AND TOP OF PIER SET 6" BELOW FINISHED FLOOR.
16. DOTTED LINE INDICATES WALL LINE OF BASE UNIT.
17. 8" DEEP X 16" WIDE THICKENED SLAB WITH (2) NO. 4 REBAR CONTINUOUS.
18. 24" DIA. FOOTING - MAINTAIN BOTTOM OF FOOTING A MINIMUM 30" BELOW FINISH GRADE.
19. 12" DEEP CONCRETE FOOTING WITH (2) NO. 5 REBAR EACH WAY - SEE PLANS FOR SIZE - MAINTAIN BOTTOM OF FOOTING A MINIMUM 30" BELOW FINISH GRADE. 12" THICKENED SLAB EDGE TO CONTINUE DOWN TO FOOTING.
20. 24" WIDE CONCRETE FOOTINGS WITH STEEL BAR REINFORCING AS REQUIRED BY SOILS ENGINEER - MAINTAIN BOTTOM OF FOOTING A MINIMUM 30" BELOW FINISH GRADE AND TOP OF FOOTING SET 12" BELOW FINISHED FLOOR.
21. 12" DEEP X 16" WIDE THICKENED SLAB WITH (2) NO. 4 REBAR CONTINUOUS. TYPICAL UNDER ALL INTERIOR SHEAR WALLS.
22. 36" SQUARE CONCRETE FOOTING WITH STEEL BAR REINFORCING AS REQUIRED BY SOILS ENGINEER - MAINTAIN BOTTOM OF FOOTING A MINIMUM 30" BELOW FINISH GRADE AND TOP OF FOOTING SET 12" BELOW FINISHED FLOOR.
23. 30" SQUARE CONCRETE FOOTING WITH STEEL BAR REINFORCING AS REQUIRED BY SOILS ENGINEER - MAINTAIN BOTTOM OF FOOTING A MINIMUM 30" BELOW FINISH GRADE AND TOP OF FOOTING SET 12" BELOW FINISHED FLOOR.
24. 24" SQUARE X 8" DEEP THICKENED SLAB WITH (3) NO. 4 REBAR CONTINUOUS EACH WAY.

GENERAL FOUNDATION NOTES

1. SOIL BEARING CAPACITY ASSUMED TO BE 2500 PSF AND SHALL BE VERIFIED BY SOILS ENGINEER PRIOR TO PLACEMENT OF BUILDING FOUNDATION. CONSULT ARCHITECT WHEN INADEQUATE SOIL CAPACITIES ARE FOUND.
2. ALL DIMENSIONS ARE TO FACE OF FOUNDATION / BASEMENT WALL UNLESS NOTED OTHERWISE.
3. HOLD DOWN TOP OF FOUNDATION WALL 8" AT ALL ENTRY DOORS TO ALLOW FOR EXTENSION OF FLOOR SLAB UNDER THE DOOR THRESHOLDS.
4. PLUMBING CONTRACTOR TO USE ROUND BUCKETS FOR FORMED SLAB PENETRATIONS.
5. CONCRETE CONTRACTOR TO INSTALL 1/2" EXP. JT. AROUND THE PERIMETER OF GARAGES.
6. CONCRETE CONTRACTOR COORDINATE WITH PLUMBING FOR LOCATION OF BLOCKOUTS FOR UNDERSLAB LINES.
7. CONCRETE CONTRACTOR - SEE FIRST FLOOR PLAN FOR SIDEWALKS AND PATIOS.
8. CONCRETE CONTRACTOR TO VERIFY SLAB PENETRATION AT TUB/SHOOWER OPTIONS.
9. SEE WALL SECTION SHEETS FOR ANCHOR BOLT SPECIFICATIONS.



Foundation Development
Group, LLC & Bel Haven, LLC
Bel Haven
Beckett Road
West Chester, Ohio 45069

PROPRIETARY RIGHTS NOTICE
COPYRIGHT 2007 EPCON COMMUNITIES FRANCHISING, INC.
ALL RIGHTS ARE RESERVED IN THIS INFORMATION AND ALL RELATED ILLUSTRATIONS, PLANS, BLUEPRINTS, SKETCHES, DRAWINGS, OR ANY OTHER TANGIBLE EXPRESSIONS THEREOF, WHICH ARE THE PROPERTY OF EPCON COMMUNITIES FRANCHISING, INC., 500 STONEHENGE PARKWAY, DUBLIN, OHIO 43017, TELEPHONE (614) 552-3322. NO ONE MAY BUILD, LICENSE, TRANSFER, REPRODUCE OR DUPLICATE THIS WORK IN ANY WAY WITHOUT THE WRITTEN AUTHORIZATION OF EPCON COMMUNITIES FRANCHISING, INC.
THESE DRAWINGS SHALL BE USED IN CONFORMANCE WITH ALL LOCAL BUILDING, MECHANICAL, PLUMBING AND ELECTRICAL CODES AND SHALL MEET THE REQUIREMENTS OF THE HEALTH DEPARTMENT, FIRE MARSHALL, AMERICANS WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES (ADAAG), THE FAIR HOUSING ACT ACCESSIBILITY GUIDELINES (FHAG), AND SHALL BE CONSTRUCTED IN CONFORMANCE WITH STATE AND LOCAL ENERGY REQUIREMENTS.

Prototype Disk No.	Interim Revision	Page Revisions Date
		1/2/19


Architect Project Number
2019-044

Community Dates & Revisions


Date Originated	20 DEC 2019
Bid	
Permit	
Construction	
Revisions	
△	△
△	△
△	△

Drawing Title
Foundation Plan

Architectural Style
European Country
Sheet Number
A.100
D4 Bonus - 2017

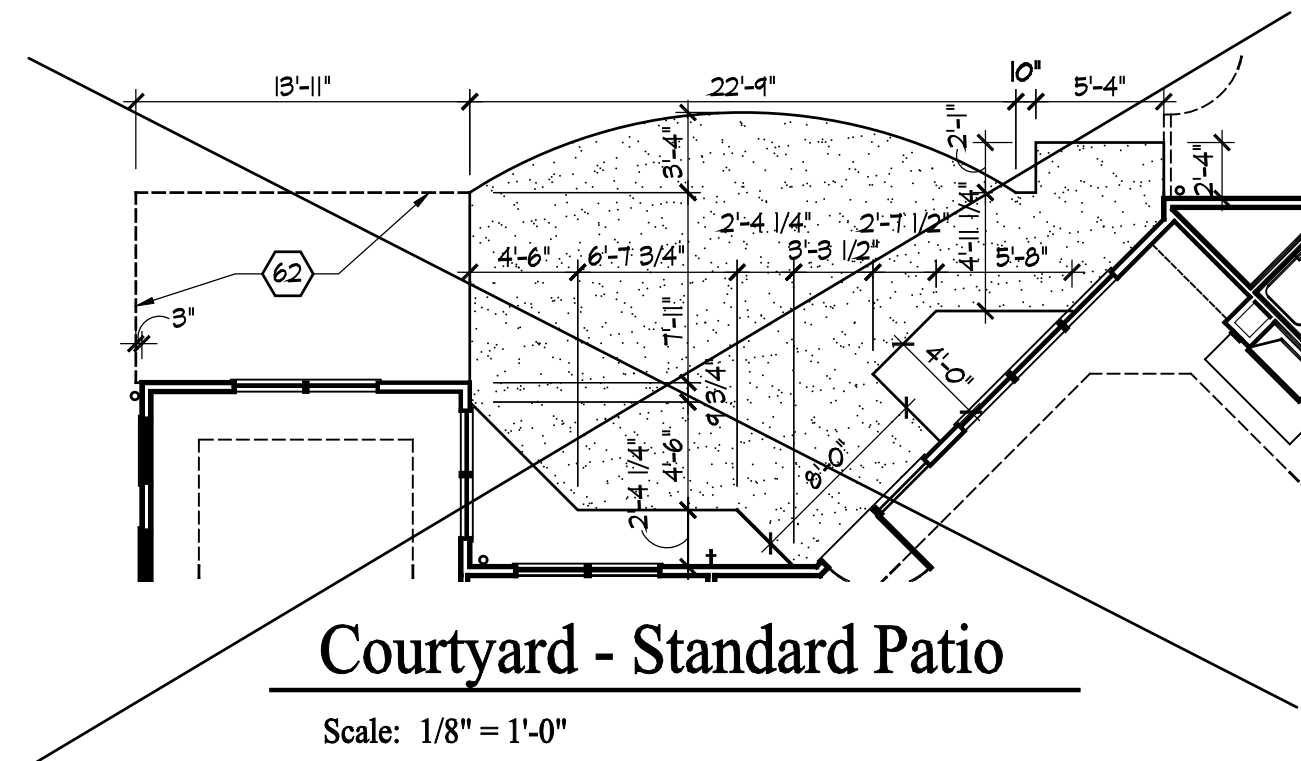

Irrigation Line
Icemaker
Gas Furnace , Heater , Grill , Fireplace
Humidifier
Wall Hung Laundry tub
Custom shower control master bath - see drawing

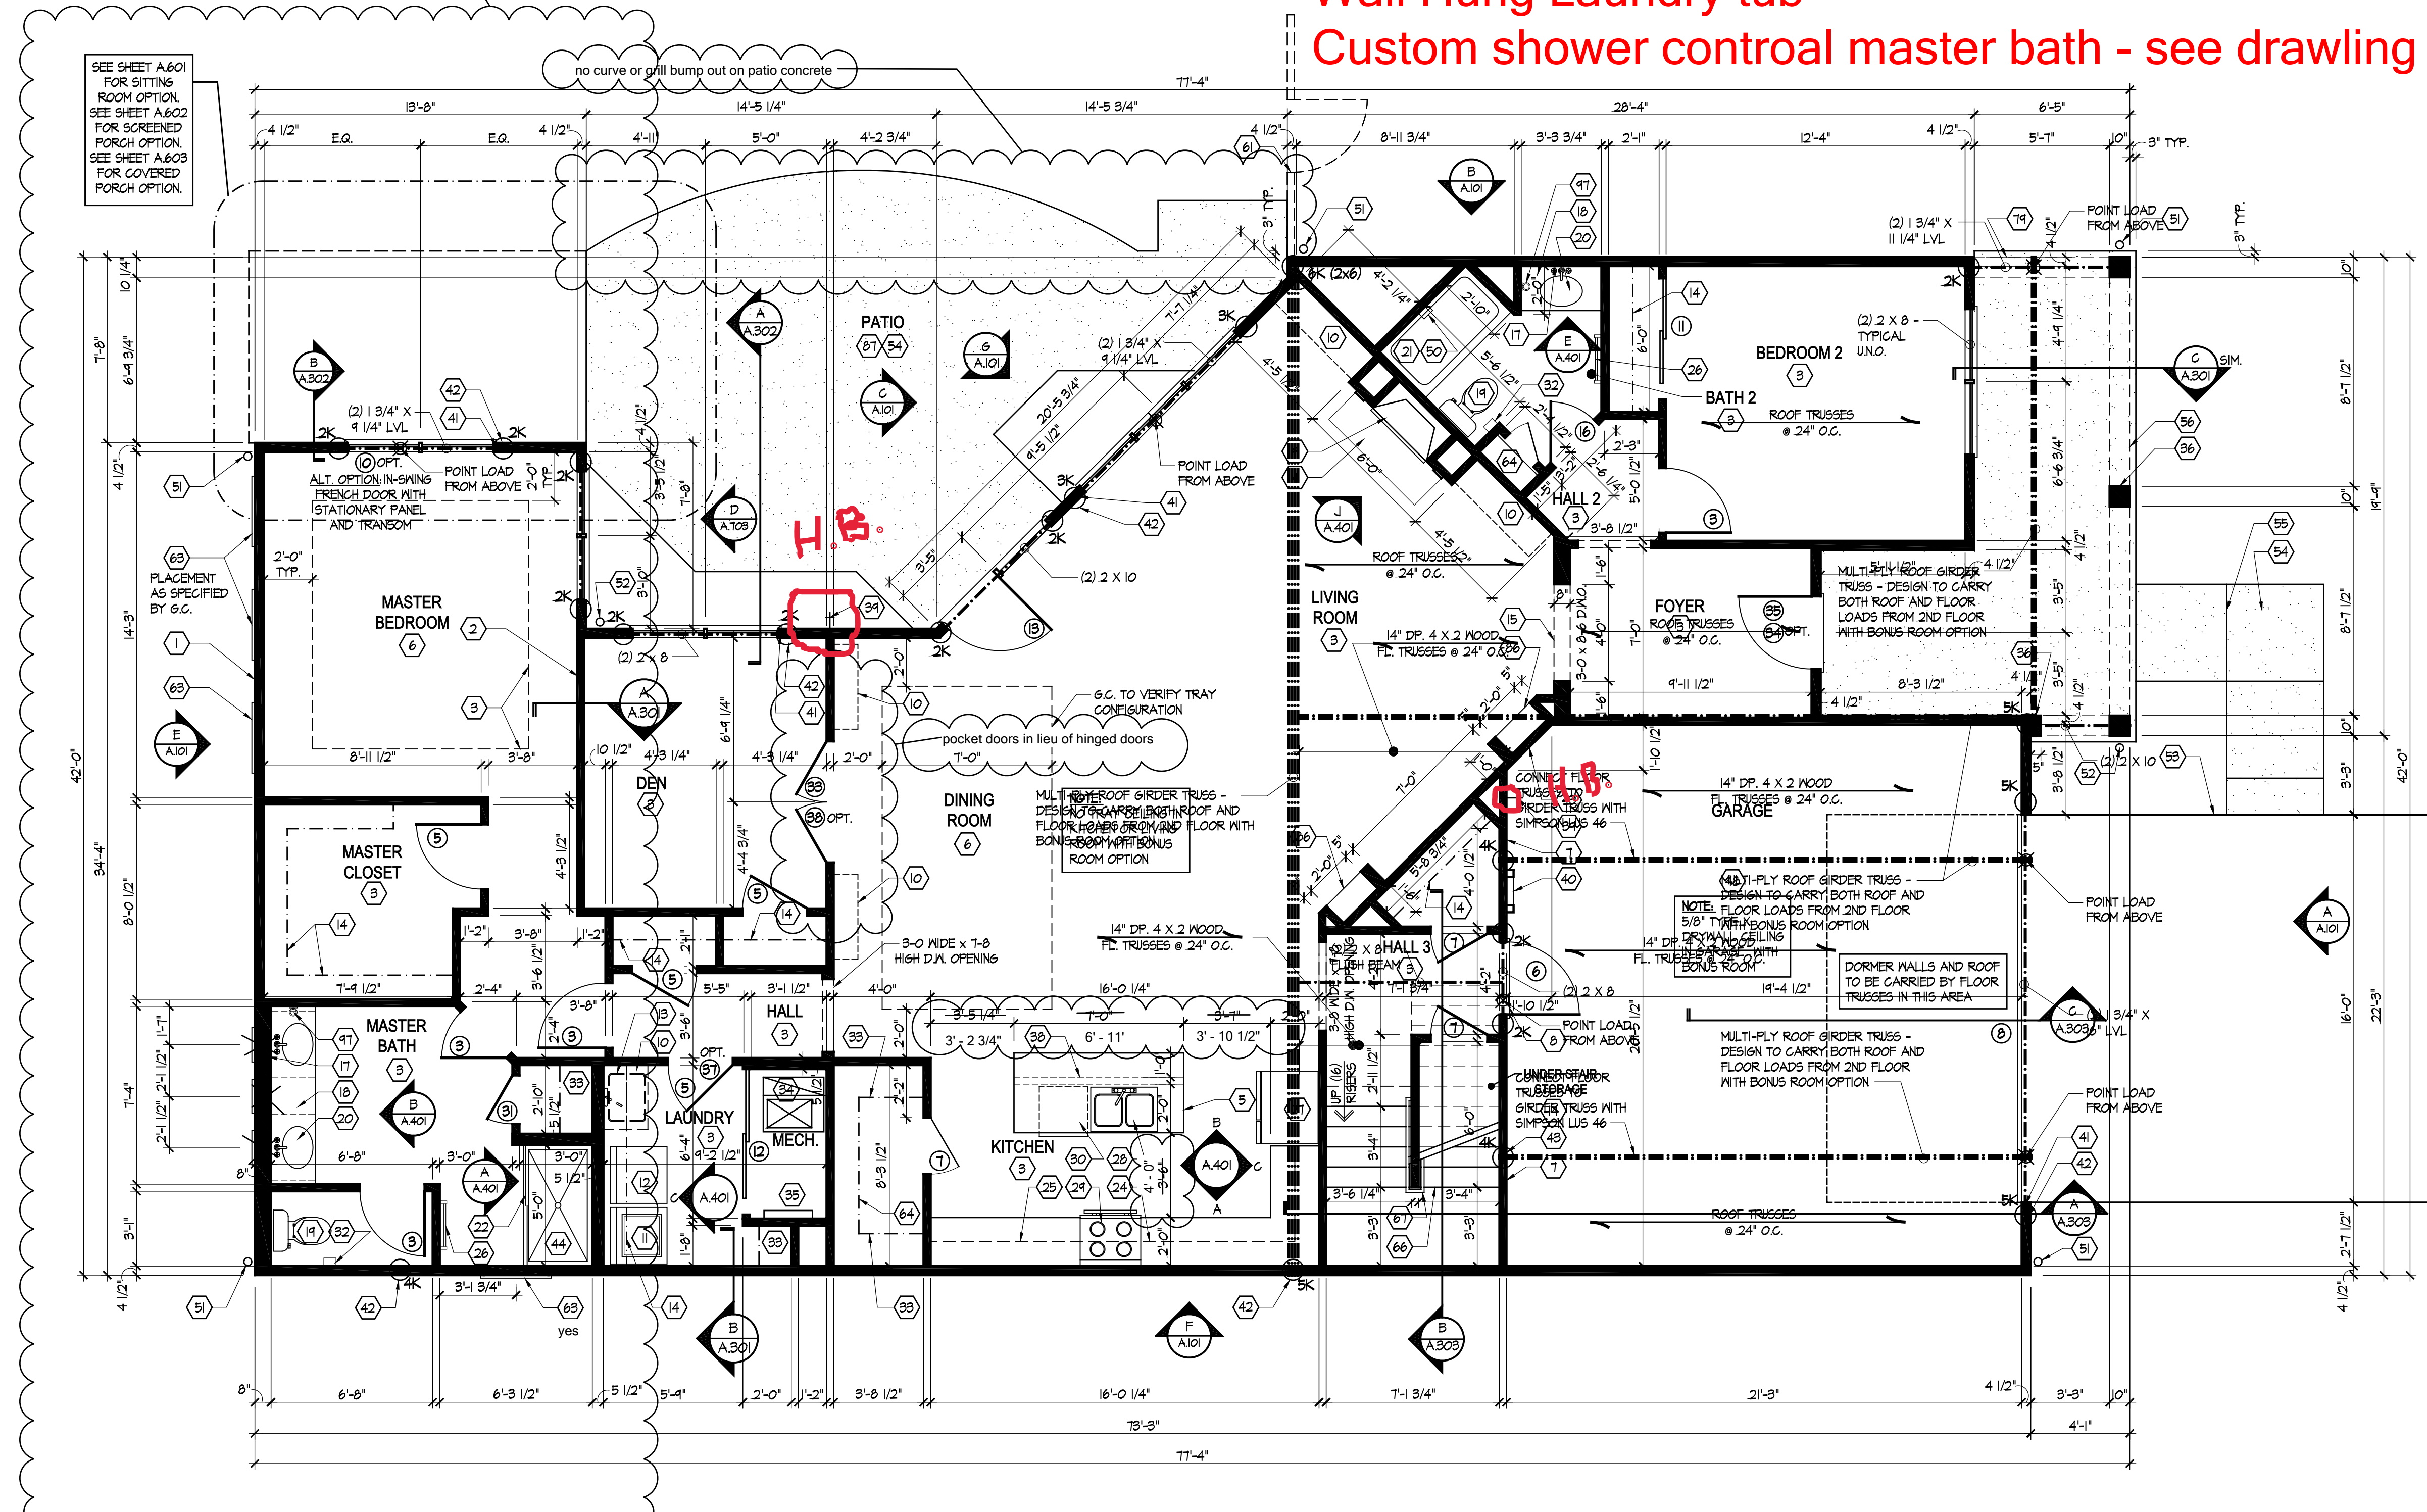


First Floor Plan
Scale: 1/4" = 1'-0"
SEE SHEET S.101 FOR STRUCTURAL FRAMING PLAN.

GENERAL NOTES

1. PLAN DIMENSIONS ARE TO FACE OF ROUGH FRAMING. EXTERIOR WALL DIMENSIONS INCLUDE THICKNESS OF SHEATHING.
2. REFER TO SITE LAYOUT PLAN FOR BUILDING LOCATIONS AND ORIENTATIONS.
3. DOORS NOT OTHERWISE DIMENSIONED SHALL BE LOCATED WITH ROUGH OPENING 4" FROM INTERSECTING WALLS.
4. USE ONE CRIPPLE (JACK) STUD AND ONE FULL HEIGHT (KING) STUD UNDER BEAM AND HEADER BEARING LESS THAN 4'-0" AND ONE CRIPPLE STUD AND TWO FULL HEIGHT STUDS UNDER BEAM AND HEADER BEARING 4'-0" OR GREATER, UNLESS SHOWN OTHERWISE.
5. DIMENSIONS AS ROUGH-IN FOR COURTYARDS - LOCATION PER 6.C.

FIRST FLOOR PLAN CODED NOTES

- (FIRST FLOOR UNIT PLANS ONLY)
(ALL NOTES NOT APPLICABLE TO ALL SHEETS/UNIT TYPES)
1. EXTERIOR STUD WALL: 2 x 4 WOOD STUDS AT 16" O.C. WITH 1/2" DRYWALL ON ALL INTERIOR SURFACES AND 1" ZIP SYSTEM "R-SHEATHING" ON EXTERIOR SURFACES. TYPICAL UNLESS NOTED OTHERWISE.
 2. INTERIOR STUD WALL: 2 x 4 WOOD STUDS AT 16" O.C. WITH 1/2" DRYWALL ON ALL FINISHED SURFACES - TYPICAL.
 3. FLAT DRYWALL CEILING @ 9'-0" A.F.F. - TYPICAL UNLESS NOTED OTHERWISE.
 4. 12" DEEP CERAMIC TILE HEARTH EXTENSION - CENTERED ON FIREBOX. SEE FLOOR PLAN FOR WIDTH.
 5. ISLAND BASE CABINETS & COUNTERTOP - FINISH ALL EDGES OF CABINETS & COUNTERTOP. TRAY CEILING @ 10'-0" A.F.F.
 6. PROVIDE FIBERGLASS BATT INSULATION IN GARAGE WALLS COMMON TO LIVING SPACE.
 7. GARAGE SLAB & FIRST FLOOR FLUSH AT BACK OF GARAGE - SLOPE 6" TO GARAGE DOOR.
 8. (OPTIONAL) PREFABRICATED METAL FIREBOX UNIT. PROVIDE GAS LINE, GAS LOG SET AND SCREEN. CONFIRM ROUGH OPENINGS OF FIREPLACE WITH PROJECT MANAGER.
 9. OPTIONAL CABINETS - SEE INTERIOR ELEVATIONS.
 10. WASHER LOCATION - PROVIDE WASHER BOX ON BACK WALL. WASHER ALWAYS LOCATED LEFT OF DRYER.
 11. DRYER LOCATION - DRYER VENT IN WALL.
 12. OPTIONAL UTILITY SINK AND FAUCET - INSTALL ROUGH-IN PLUMBING ONLY.
 13. SINGLE CLOSET ROD & SHELF (6" 1/2" A.F.F.) - VINYL COATED WIRE WITH STANDARD SPACINGS.
 14. ARCHED OPENING: SPRING POINT @ 7'-9" A.F.F. TOP OF ARCH 8'-6" ABOVE SPRING POINT.
 15. LOCATION OF DOUBLE 2 x 4 STUD WALL.
 16. FRAMELESS MIRROR LOCATION - 42" HIGH x 2" SHORTER THAN VANITY TOP (1" EACH SIDE) - SET BOTTOM OF MIRROR AT TOP OF BACKSPLASH.
 17. VANITY BASE AND COUNTERTOP 3/16" A.F.F.
 18. TOILET & SEAT.
 19. SELF-RIMMING COUNTER LAVATORY AND FAUCET.
 20. 32" x 60" STANDARD TUB SHOWER & FAUCET WITH CERAMIC TILE SURROUND.
 21. TEMPERED GLASS SHOWER ENCLOSURE AND DOOR.
 22. 22" x 54" OPTIONAL FULL DOWN STAIR LOCATED BETWEEN TRUSSES ABOVE. DRYWALL ON STAIR SHALL BE MOUNTED WITH SCREWS INTO THE TOP & BOTTOM DOOR CROSS SUPPORTS WITH THE CENTER GLUED LEAVING NO SCREWS EXPOSED. (ATTIC ACCESS PANEL REQUIRED IF FULL-DOWN STAIR OPTION IS NOT CHOSEN. SEE NOTE #13 FOR MORE INFORMATION.)
 23. BASE CABINETS AND COUNTERTOP.
 24. LINE OF WALL CABINETS ABOVE.
 25. 24" LONG TOWEL BAR - 54" A.F.F. (58" A.F.F. ABOVE TOILET).
 26. REFRIGERATOR LOCATION.
 27. DOUBLE BOWL SINK AND FAUCET.
 28. RANGE LOCATION.
 29. DISHWASHER LOCATION.
 30. 10" x 10" BUILT-UP COLUMN - TYPICAL. SEE DETAIL D, SHEET A304 FOR MORE INFORMATION.
 31. 8'-1/2" x 8'-1/2" FRAMING DIMENSION FOR COLUMN.
 32. TOILET PAPER DISPENSER.
 33. (4) 16" DEEP WIRE SHELVES (24", 42", 55", 68" A.F.F.) - STANDARD SPACINGS. TYPICAL AT LINEN CLOSETS AND PANTRIES, UNLESS NOTED OTHERWISE.
 34. FURNACE LOCATION.
 35. TANKLESS WATER HEATER.
 36. 10" x 10" BUILT-UP COLUMN / PILLASTER - TYPICAL. SEE DETAIL F, SHEET A304 FOR MORE INFORMATION.
 37. 16'-0" x 8'-0" ATTIC STORAGE ABOVE - PROVIDE 3/4" APA RATED SUB-FLOORING ON BOTTOM CHORD OF TRUSSES. OSB SHEATHING RATED FOR 20 PSF LIVE LOAD IS PERMITTED AS AN ALTERNATE.
 38. 3/4" TALL FRAMED 1/2 WALL TO UNDERSIDE OF BAR COUNTERTOP.
 39. HOSE BIBB LOCATION.
 40. SURFACE MOUNTED ELECTRIC PANEL LOCATION. SEE DETAIL ON SHEET A304.
 41. PROVIDE (2) CRIPPLE STUDS (JACKS) UNDER ALL HEADERS IN OPENINGS OVER 48" WIDE - TYPICAL. SEE GENERAL NOTES FOR MORE INFORMATION.
 42. ○ K INDICATES NUMBER OF FULL-HEIGHT (KING) STUDS AT BEARING LOCATIONS.
 43. MINIMUM 1/2" DRYWALL ON GARAGE SIDE.
 44. 32" x 60" STANDARD SHOWER BASE.
 45. CUSTOM TILED ROLL-IN SHOWER BASE - SEE PLAN FOR SIZE.
 46. WOOD GUARD RAIL - SEE DETAIL K ON SHEET A304.
 47. 1/2" WIDE (BOTTOM) x 8" WIDE (TOP) PLYCON P.V.C. TAPERED COLUMN WRAP (C/P/M)X(2)X(1)T WITH CRAFTSMAN STYLE CAP AND BASE. SEE DETAIL P, SHEET A304 FOR DETAILS.
 48. FLAT DRYWALL CEILING ON UNDERSIDE OF BOTTOM CHORD OF ROOF TRUSSES OR FLOOR JOISTS.
 49. FLAT DRYWALL CEILING @ 8'-4" A.F.F.
 50. SOAP DISH @ 1" HIGH x 7" WIDE.
 51. DOWNSPOUT LOCATION.
 52. DOWNSPOUT DISCHARGED INTO BLACK PIPE AND ROUTED UNDER WALKS OR PATIO.
 53. EDGE OF DRIVEWAY.
 54. 4" THICK SLAB TYPICAL @ CONCRETE WALKS/PORCHES/PATIOS.
 55. CONTROL JOINTS - TYPICAL.
 56. DASHED LINES INDICATE BOXED BEAM ABOVE - WIDTH TO MATCH COLUMN.
 57. 12" DEEP SHELF (60" A.F.F.) - VINYL COATED WIRE - STANDARD SPACING.
 58. SHOWER WALL - 6'-0" A.F.F.
 59. OPTIONAL GARAGE SHELVING.
 60. OPTIONAL DESK.
 61. COURTYARD GATE AND FENCE LOCATION.
 62. DASHED LINE INDICATES OPTIONAL PATIO SECTION.
 63. OPTIONAL WINDOW.
 64. (4) 12" DEEP WIRE SHELVES (24", 42", 55", 68" A.F.F.) - STANDARD SPACING.
 65. 32" x 60" SHOWER BASE WITH BUILT-IN SEAT.
 66. HARDBOARD TREADS AND RISERS.
 67. WOOD HANDRAIL - 34" ABOVE STAIR TREADS. RETURN ENDS TO WALL OR NEVEL POST.
 68. SINGLE BOWL SINK AND FAUCET.
 69. 20" RANGE LOCATION.
 70. FLAT DRYWALL CEILING @ 8'-0" A.F.F.
 71. LINE OF BREAK OF SLOPED DRYWALL CEILING - FOLLOW BOTTOM CHORD OF ROOF TRUSSES OR RAFTERS ABOVE.
 72. SLOPED CEILING AREA ABOVE.
 73. ATTIC ACCESS PANEL: 22" x 30" MINIMUM. PANEL TO BE 6" MIN. ABOVE BASE IF LOCATED IN KNEE WALL. PANEL TO HAVE 1" QUARTER ROUND MOULDING AROUND EDGE. PANEL SHALL BE WEATHER-STRIPPED AND INSULATED TO A LEVEL EQUIVALENT TO THE INSULATION ON THE SURROUNDING SURFACES. IF IN THE CEILING, A BAFFLE IS REQUIRED TO CONTAIN LOOSE-FILL INSULATION.
 74. UNDER THE COUNTER REFRIGERATOR LOCATION.
 75. FLAT DRYWALL CEILING @ 7'-0" A.F.F.
 76. HALF WALL @ 36" A.F.F. WITH 1 X 6 HARDWOOD CAP.
 77. SINGLE CLOSET ROD & SHELF (48" A.F.F.) - VINYL COATED WIRE WITH STANDARD SPACINGS.
 78. KNEE WALL: 2 x 4 WOOD STUDS AT 16" O.C. WITH 1/2" DRYWALL ON ALL INTERIOR SURFACES, AND 1/4" O.S.B. BACKER PANEL ON EXTERIOR SURFACES - TYPICAL. RUN FROM FLOOR STRUCTURE BELOW TO UNDERSIDE OF ROOF FRAMING.
 79. WIDTH OF HEADER TO MATCH WIDTH OF COLUMN AND BOXED BEAMS (OR DIMS. AS SHOWN).
 80. FULL HEIGHT PANTRY CABINET - SEE INTERIOR ELEVATIONS.
 81. DASHED LINE INDICATES 9" CEILING SOFFIT FOR SANITARY LINES FROM BONUS ROOM.
 82. 10 x 10 FT. SOLID WOOD COLUMN WITH BEVEL TOP.
 83. PRESERVATIVE PRESSURE TREATED 2 x 8 PERGOLA RAFTERS @ 16" O.C. - SEE SECTIONS FOR MORE DETAIL.
 84. PRESERVATIVE PRESSURE TREATED 2 x 12 PERGOLA BEAMS - SEE SECTIONS FOR MORE DETAIL.
 85. ZERO-THRESHOLD SHOWER. SEE DETAIL ON SHEET A304.
 86. BUILT-IN BOOKSHELVES.
 87. CONCRETE PATIO - SEE LANDSCAPING PLANS FOR OPTIONS & DETAILS.
 88. BUILT-IN TILED SHOWER BENCH - SEE DETAIL ON SHEET A304.
 89. OPTIONAL 42" BUILT-IN BENCH PER 6.C.
 90. OPTIONAL 42" BUILT-IN BENCH PER 6.C.
 91. DOG WASH SHOWER BASE WITH 6" HIGH TILED STEP AND 18" HIGH TILED HALF WALL PER 6.C.
 92. OPTIONAL UNDER THE COUNTER WINE REFRIGERATOR.
 93. PROVIDE INSULATION IN SALES OFFICE WALLS AND CEILING - SEE WALL SECTION.
 94. 2 x 4 WALL WITH GLASS INSERTS AND WOOD CAP - SEE DETAILS ON SHEET A.614 FOR MORE INFORMATION.
 95. DOTTED LINE INDICATES AREA OF REQUIRED CLEARANCE FOR A.D.A. COMPLIANCE.
 96. CABINETS BY OWNER.
 97. TOWEL RING.

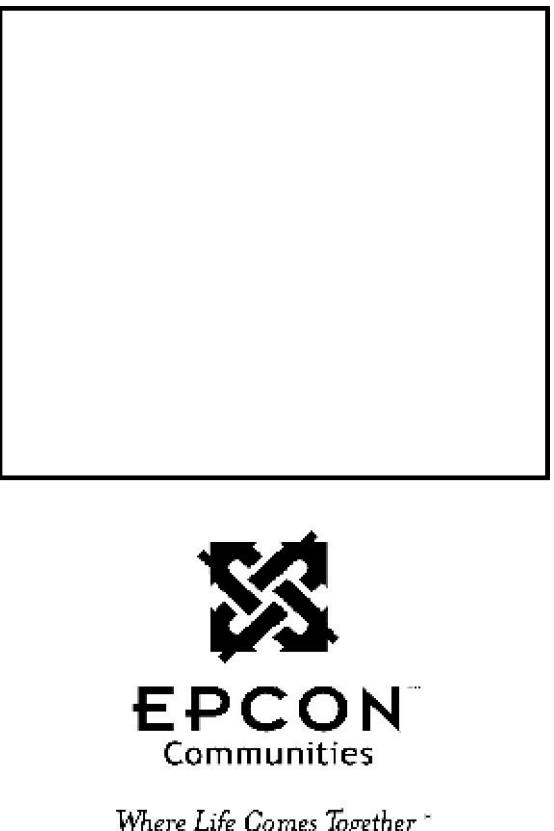

Foundation Development Group, LLC & Bel Haven, LLC
Bel Haven
Beckett Road
West Chester, Ohio 45069

PROPRIETARY RIGHTS NOTICE
COPYRIGHT 2007 EPCON COMMUNITIES FRANCHISING, INC.
ALL RIGHTS ARE RESERVED IN THIS INFORMATION AND ALL RELATED ILLUSTRATIONS, PLANS, BLUEPRINTS, SKETCHES, DRAWINGS, OR ANY OTHER TANGIBLE EXPRESSIONS THEREOF, WHICH ARE THE PROPERTY OF EPCON COMMUNITIES FRANCHISING, INC., 500 STONEHEDGE PARKWAY, DUBLIN, OHIO 43017, TELEPHONE (614) 552-3333. NO ONE MAY BUILD, LICENSE, TRANSFER, REPRODUCE OR DUPLICATE THIS WORK IN ANY WAY WITHOUT THE WRITTEN AUTHORIZATION OF EPCON COMMUNITIES FRANCHISING, INC.
THESE DRAWINGS SHALL BE USED IN CONFORMANCE WITH ALL LOCAL BUILDING, MECHANICAL, PLUMBING AND ELECTRICAL CODES AND SHALL MEET THE REQUIREMENTS OF THE HEALTH DEPARTMENT, FIRE MARSHAL, AMERICANS WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES (ADAAG), THE FAIR HOUSING ACT ACCESSIBILITY GUIDELINES (FHAG), AND SHALL BE CONSTRUCTED IN CONFORMANCE WITH STATE AND LOCAL ENERGY REQUIREMENTS.

Prototype Disk No.	Interim Revision	Page Revisions Date
		11/12/19

Architect Project Number
2019-044

Community Dates & Revisions
Date Originated: 20 DEC 2019
Bid Permit Construction

Revisions	
△	△
△	△
△	△

Drawing Title
First Floor Plan

Architectural Style
European Country
Sheet Number
A.101
D4 Bonus - 2017

SEE COMPONENTS (ATTACHED)
Off 1.12.2021



PROPRIETARY RIGHTS NOTICE
COPYRIGHT 2007 EPCON COMMUNITIES FRANCHISING, INC.
ALL RIGHTS ARE RESERVED IN THIS INFORMATION AND ALL RELATED ILLUSTRATIONS, PLANS, BLUEPRINTS, SKETCHES, DRAWINGS OR ANY OTHER TANGIBLE EXPRESSIONS THEREOF, WHICH ARE THE PROPERTY OF EPCON COMMUNITIES FRANCHISING, INC., 500 STONEHENGE PARKWAY, DUBLIN, OHIO 43017, TELEPHONE (614) 552-3337. NO ONE MAY BUILD, LICENSE, TRANSFER, REPRODUCE OR DUPLICATE THIS WORK IN ANY WAY WITHOUT THE WRITTEN AUTHORIZATION OF EPCON COMMUNITIES FRANCHISING, INC.
THESE DRAWINGS SHALL BE USED IN CONFORMANCE WITH ALL LOCAL BUILDING, MECHANICAL, PLUMBING AND ELECTRICAL CODES AND SHALL MEET THE REQUIREMENTS OF THE HEALTH DEPARTMENT, FIRE MARSHAL, AMERICANS WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES (ADAAG), THE FAIR HOUSING ACT ACCESSIBILITY GUIDELINES (FHAG), AND SHALL BE CONSTRUCTED IN CONFORMANCE WITH STATE AND LOCAL ENERGY REQUIREMENTS.

Prototype Disk No.	Interim Revision	Page Revisions Date
		8/7/20

Architect Project Number
2019-044

Community Dates & Revisions
Date Originated 20 DEC 2019
Bid Permit Construction

Revisions

▲	▲
▲	▲
▲	▲


Drawing Title
Second Floor Plan

GENERAL NOTES

1. PLAN DIMENSIONS ARE TO FACE OF ROUGH FRAMING. EXTERIOR WALL DIMENSIONS INCLUDE THICKNESS OF SHEATHING.
2. REFER TO SITE LAYOUT PLAN FOR BUILDING LOCATIONS AND ORIENTATIONS.
3. DOORS NOT OTHERWISE DIMENSIONED SHALL BE LOCATED WITH ROUGH OPENING 4" FROM INTERSECTING WALLS.
4. USE ONE CRIPPLE (JACK) STUD AND ONE FULL HEIGHT (KING) STUD UNDER BEAM AND HEADER BEARING LESS THAN 4'-0" AND ONE CRIPPLE STUD AND TWO FULL HEIGHT STUDS UNDER BEAM AND HEADER BEARING 4'-0" OR GREATER, UNLESS SHOWN OTHERWISE.
5. OPTIONAL GAS ROUGH-IN FOR COURTYARDS - LOCATION PER G.C.


FIRST FLOOR PLAN CODED NOTES

- (FIRST FLOOR UNIT PLANS ONLY)
(ALL NOTES NOT APPLICABLE TO ALL SHEETS/UNIT TYPES)
1. EXTERIOR STUD WALL: 2 x 4 WOOD STUDS AT 16" O.C. WITH 1/2" DRYWALL ON ALL INTERIOR SURFACES, AND 1" ZIP SYSTEM "R-SHEATHING" ON EXTERIOR SURFACES. TYPICAL UNLESS NOTED OTHERWISE.
 2. INTERIOR STUD WALL: 2 x 4 WOOD STUDS AT 16" O.C. WITH 1/2" DRYWALL ON ALL FINISHED SURFACES - TYPICAL.
 3. FLAT DRYWALL CEILING @ 9'-0" A.F.F. - TYPICAL UNLESS NOTED OTHERWISE.
 4. 12" DEEP CERAMIC TILE HEARTH EXTENSION - CENTERED ON FIREBOX. SEE FLOOR PLAN FOR WIDTH.
 5. ISLAND BASE CABINETS & COUNTERTOP - FINISH ALL EDGES OF CABINETS & COUNTERTOP. TRAY CEILING @ 10'-0" A.F.F.
 6. PROVIDE FIBERGLASS BATT INSULATION IN GARAGE WALLS COMMON TO LIVING SPACE.
 7. GARAGE SLAB & FIRST FLOOR FLUSH AT BACK OF GARAGE - SLOPE 6" TO GARAGE DOOR.
 8. (OPTIONAL) PREFABRICATED METAL FIREBOX UNIT, PROVIDE GAS LINE, GAS LOG SET AND SCREEN. CONFIRM ROUGH OPENINGS OF FIREPLACE WITH PROJECT MANAGER.
 9. OPTIONAL CABINETS - SEE INTERIOR ELEVATIONS.
 10. WASHER LOCATION - PROVIDE WASHER BOX ON BACK WALL. WASHER ALWAYS LOCATED LEFT OF DRYER.
 11. DRYER LOCATION - DRYER VENT IN WALL.
 12. OPTIONAL UTILITY SINK AND FAUCET - INSTALL ROUGH-IN PLUMBING ONLY.
 13. SINGLE CLOSET ROD & SHELF (6" 1/2" A.F.F.) - VINYL COATED WIRE WITH STANDARD SPACINGS.
 14. ARCHED OPENING - SPRING POINT @ 7'-9" A.F.F., TOP OF ARCH 8'-6" ABOVE SPRING POINT.
 15. LOCATION OF DOUBLE 2 X 4 STUD WALL.
 16. FRAMELESS MIRROR LOCATION - 42" HIGH X 2" SHORTER THAN VANITY TOP (1" EACH SIDE) - SET BOTTOM OF MIRROR AT TOP OF BACKSPLASH.
 17. VANITY BASE AND COUNTERTOP 31 1/2" A.F.F.
 18. TOILET & SEAT.
 19. SELF-RIMMING COUNTER LAVATORY AND FAUCET.
 20. 32" X 60" STANDARD TUB SHOWER & FAUCET WITH CERAMIC TILE SURROUND.
 21. TEMPERED GLASS SHOWER ENCLOSURE AND DOOR.
 22. 22" X 54" OPTIONAL FULL DOWN STAIR LOCATED BETWEEN TRUSSES ABOVE. DRYWALL ON STAIR SHALL BE MOUNTED WITH SCREWS INTO THE TOP & BOTTOM DOOR CROSS SUPPORTS WITH THE CENTER GLUED LEAVING NO SCREWS EXPOSED. (ATTIC ACCESS PANEL REQUIRED IF FULL-DOWN STAIR OPTION IS NOT CHOSEN. SEE NOTE #13 FOR MORE INFORMATION.)
 23. BASE CABINETS AND COUNTERTOP.
 24. LINE OF WALL CABINETS ABOVE.
 25. 24" LONG TOWEL BAR - 54" A.F.F. (58" A.F.F. ABOVE TOILET).
 26. REFRIGERATOR LOCATION.
 27. DOUBLE BOIL SINK AND FAUCET.
 28. RANGE LOCATION.
 29. DISHWASHER LOCATION.
 30. 10" X 10" BUILT-UP COLUMN / PILLAR - TYPICAL. SEE DETAIL D, SHEET A304 FOR MORE INFORMATION.
 31. 8-1/2" X 8-1/2" FRAMING DIMENSION FOR COLUMN.
 32. TOILET PAPER DISPENSER.
 33. (4) 16" DEEP WIRE SHELVES (24", 42", 55", 68" A.F.F.) - STANDARD SPACINGS. TYPICAL AT LINEN CLOSETS AND PANTRIES, UNLESS NOTED OTHERWISE.
 34. FURNACE LOCATION.
 35. TANKLESS WATER HEATER.
 36. 10" X 10" BUILT-UP COLUMN / PILLAR - TYPICAL. SEE DETAIL F, SHEET A304 FOR MORE INFORMATION.
 37. 16'-0" X 8'-0" ATTIC STORAGE ABOVE - PROVIDE 3/4" APA RATED SUB-FLOORING ON BOTTOM CHORD OF TRUSSES. OSB SHEATHING RATED FOR 20 PSF LIVE LOAD IS PERMITTED AS AN ALTERNATE.
 38. 34" TALL FRAMED 1/2 WALL TO UNDERSIDE OF BAR COUNTERTOP.
 39. HOSE BIBB LOCATION.
 40. SURFACE MOUNTED ELECTRIC PANEL LOCATION. SEE DETAIL ON SHEET A304.
 41. PROVIDE (2) CRIPPLE STUDS (JACKS) UNDER ALL HEADERS IN OPENINGS OVER 48" WIDE - TYPICAL. SEE GENERAL NOTES FOR MORE INFORMATION.
 42. ○ INDICATES NUMBER OF FULL-HEIGHT (KING) STUDS AT BEARING LOCATIONS.
 43. MINIMUM 1/2" DRYWALL ON GARAGE SIDE.
 44. 32" X 60" STANDARD SHOWER BASE.
 45. CUSTOM TILED ROLL-IN SHOWER BASE - SEE PLAN FOR SIZE.
 46. WOOD GUARD RAIL - SEE DETAIL K ON SHEET A304.
 47. 12" WIDE (BOTTOM) X 8" WIDE (TOP) IPEX P.V.C. TAPERED COLUMN WRAP (1/2" X 1/2" X 1/2" T) WITH CRAFTSMAN STYLE CAP AND BASE. SEE DETAIL P, SHEET A304 FOR DETAILS.
 48. FLAT DRYWALL CEILING ON UNDERSIDE OF BOTTOM CHORD OF ROOF TRUSSES OR FLOOR JOISTS.
 49. FLAT DRYWALL CEILING @ 8'-4" A.F.F.
 50. SOAP DISH 5" HIGH X 7" WIDE.
 51. DOWNSPOUT LOCATION.
 52. DOWNSPOUT DISCHARGED INTO BLACK PIPE AND ROUTED UNDER WALKS OR PATIO.
 53. EDGE OF DRIVEWAY.
 54. 4" THICK SLAB TYPICAL @ CONCRETE WALKS/PORCHES/PATIOS.
 55. CONTROL JOINTS - TYPICAL.
 56. DASHED LINE INDICATE BOXED BEAM ABOVE - WIDTH TO MATCH COLUMN.
 57. 12" DEEP SHELF (60" A.F.F.) - VINYL COATED WIRE - STANDARD SPACING.
 58. SHOWER WALL - 6'-0" A.F.F.
 59. OPTIONAL GARAGE SHELVING.
 60. OPTIONAL DESK.
 61. COURTYARD GATE AND FENCE LOCATION.
 62. DASHED LINE INDICATES OPTIONAL PATIO SECTION.
 63. OPTIONAL WINDOW.
 64. (4) 12" DEEP WIRE SHELVES (24", 42", 55", 68" A.F.F.) - STANDARD SPACING.
 65. 32" X 60" SHOWER BASE WITH BUILT-IN SEAT.
 66. HARDBOARD TREADS AND RISERS.
 67. WOOD HANDRAIL - 34" ABOVE STAIR TREADS. RETURN ENDS TO WALL OR NEVEL POST.
 68. SINGLE BOYL SINK AND FAUCET.
 69. 20" RANGE LOCATION.
 70. FLAT DRYWALL CEILING @ 8'-0" A.F.F.
 71. LINE OF BREAK OF SLOPED DRYWALL CEILING - FOLLOW BOTTOM CHORD OF ROOF TRUSSES OR RAFTERS ABOVE.
 72. SLOPED CEILING AREA ABOVE.
 73. ATTIC ACCESS PANEL: 22" X 30" MINIMUM. PANEL TO BE 6" MIN. ABOVE BASE IF LOCATED IN KNEE WALL. PANEL TO HAVE 1" QUARTER ROUND MOLDING AROUND EDGE. PANEL SHALL BE WEATHER-STRIPPED AND INSULATED TO A LEVEL EQUIVALENT TO THE INSULATION ON THE SURROUNDING SURFACES. IF IN THE CEILING, A BAFFLE IS REQUIRED TO CONTAIN LOOSE-FILL INSULATION.
 74. UNDER THE COUNTER REFRIGERATOR LOCATION.
 75. FLAT DRYWALL CEILING @ 7'-0" A.F.F.
 76. HALF WALL @ 36" A.F.F. WITH 1 X 6 HARDWOOD CAP.
 77. SINGLE CLOSET ROD & SHELF (48" A.F.F.) - VINYL COATED WIRE WITH STANDARD SPACINGS.
 78. KNEE WALL: 2 X 4 WOOD STUDS AT 16" O.C. WITH 1/2" DRYWALL ON ALL INTERIOR SURFACES, AND 1/4" O.S.B. BACKER PANEL ON EXTERIOR SURFACES - TYPICAL. RUN FROM FLOOR STRUCTURE BELOW TO UNDERSIDE OF ROOF FRAMING.
 79. WIDTH OF HEADER TO MATCH WIDTH OF COLUMN AND BOXED BEAMS (OR DIMS. AS SHOWN).
 80. FULL HEIGHT PANTRY CABINET - SEE INTERIOR ELEVATIONS.
 81. DASHED LINE INDICATES 8" CEILING SOFFIT FOR SANITARY LINES FROM BONUS ROOM.
 82. 10 X 10 F.T. SOLID WOOD COLUMN WITH BEVEL TOP.
 83. PRESERVATIVE PRESSURE TREATED 2 X 8 PERGOLA RAFTERS @ 16" O.C. - SEE SECTIONS FOR MORE DETAIL.
 84. PRESERVATIVE PRESSURE TREATED 2 X 12 PERGOLA BEAMS - SEE SECTIONS FOR MORE DETAIL.
 85. ZERO-THRESHOLD SHOWER. SEE DETAIL ON SHEET A304.
 86. BUILT-IN BOOKSHELVES.
 87. CONCRETE PATIO - SEE LANDSCAPING PLANS FOR OPTIONS & DETAILS.
 88. BUILT-IN TILED SHOWER BENCH - SEE DETAIL ON SHEET A304.
 89. OPTIONAL 42" WIDE X 18" DEEP BASE CABINET PER G.C.
 90. OPTIONAL 42" BUILT-IN BENCH PER G.C.
 91. DOG WASH SHOWER BASE WITH 6" HIGH TILED STEP AND 18" HIGH TILED HALF WALL PER G.C.
 92. OPTIONAL UNDER THE COUNTER WINE REFRIGERATOR.
 93. PROVIDE INSULATION IN SALES OFFICE WALLS AND CEILING - SEE WALL SECTION.
 94. 2 X 4 WALL WITH GLASS INSERTS AND WOOD CAP - SEE DETAILS ON SHEET A614 FOR MORE INFORMATION.
 95. DOTTED LINE INDICATES AREA OF REQUIRED CLEARANCE FOR A.D.A. COMPLIANCE.
 96. CABINETS BY OWNER.
 97. TOWEL RING.

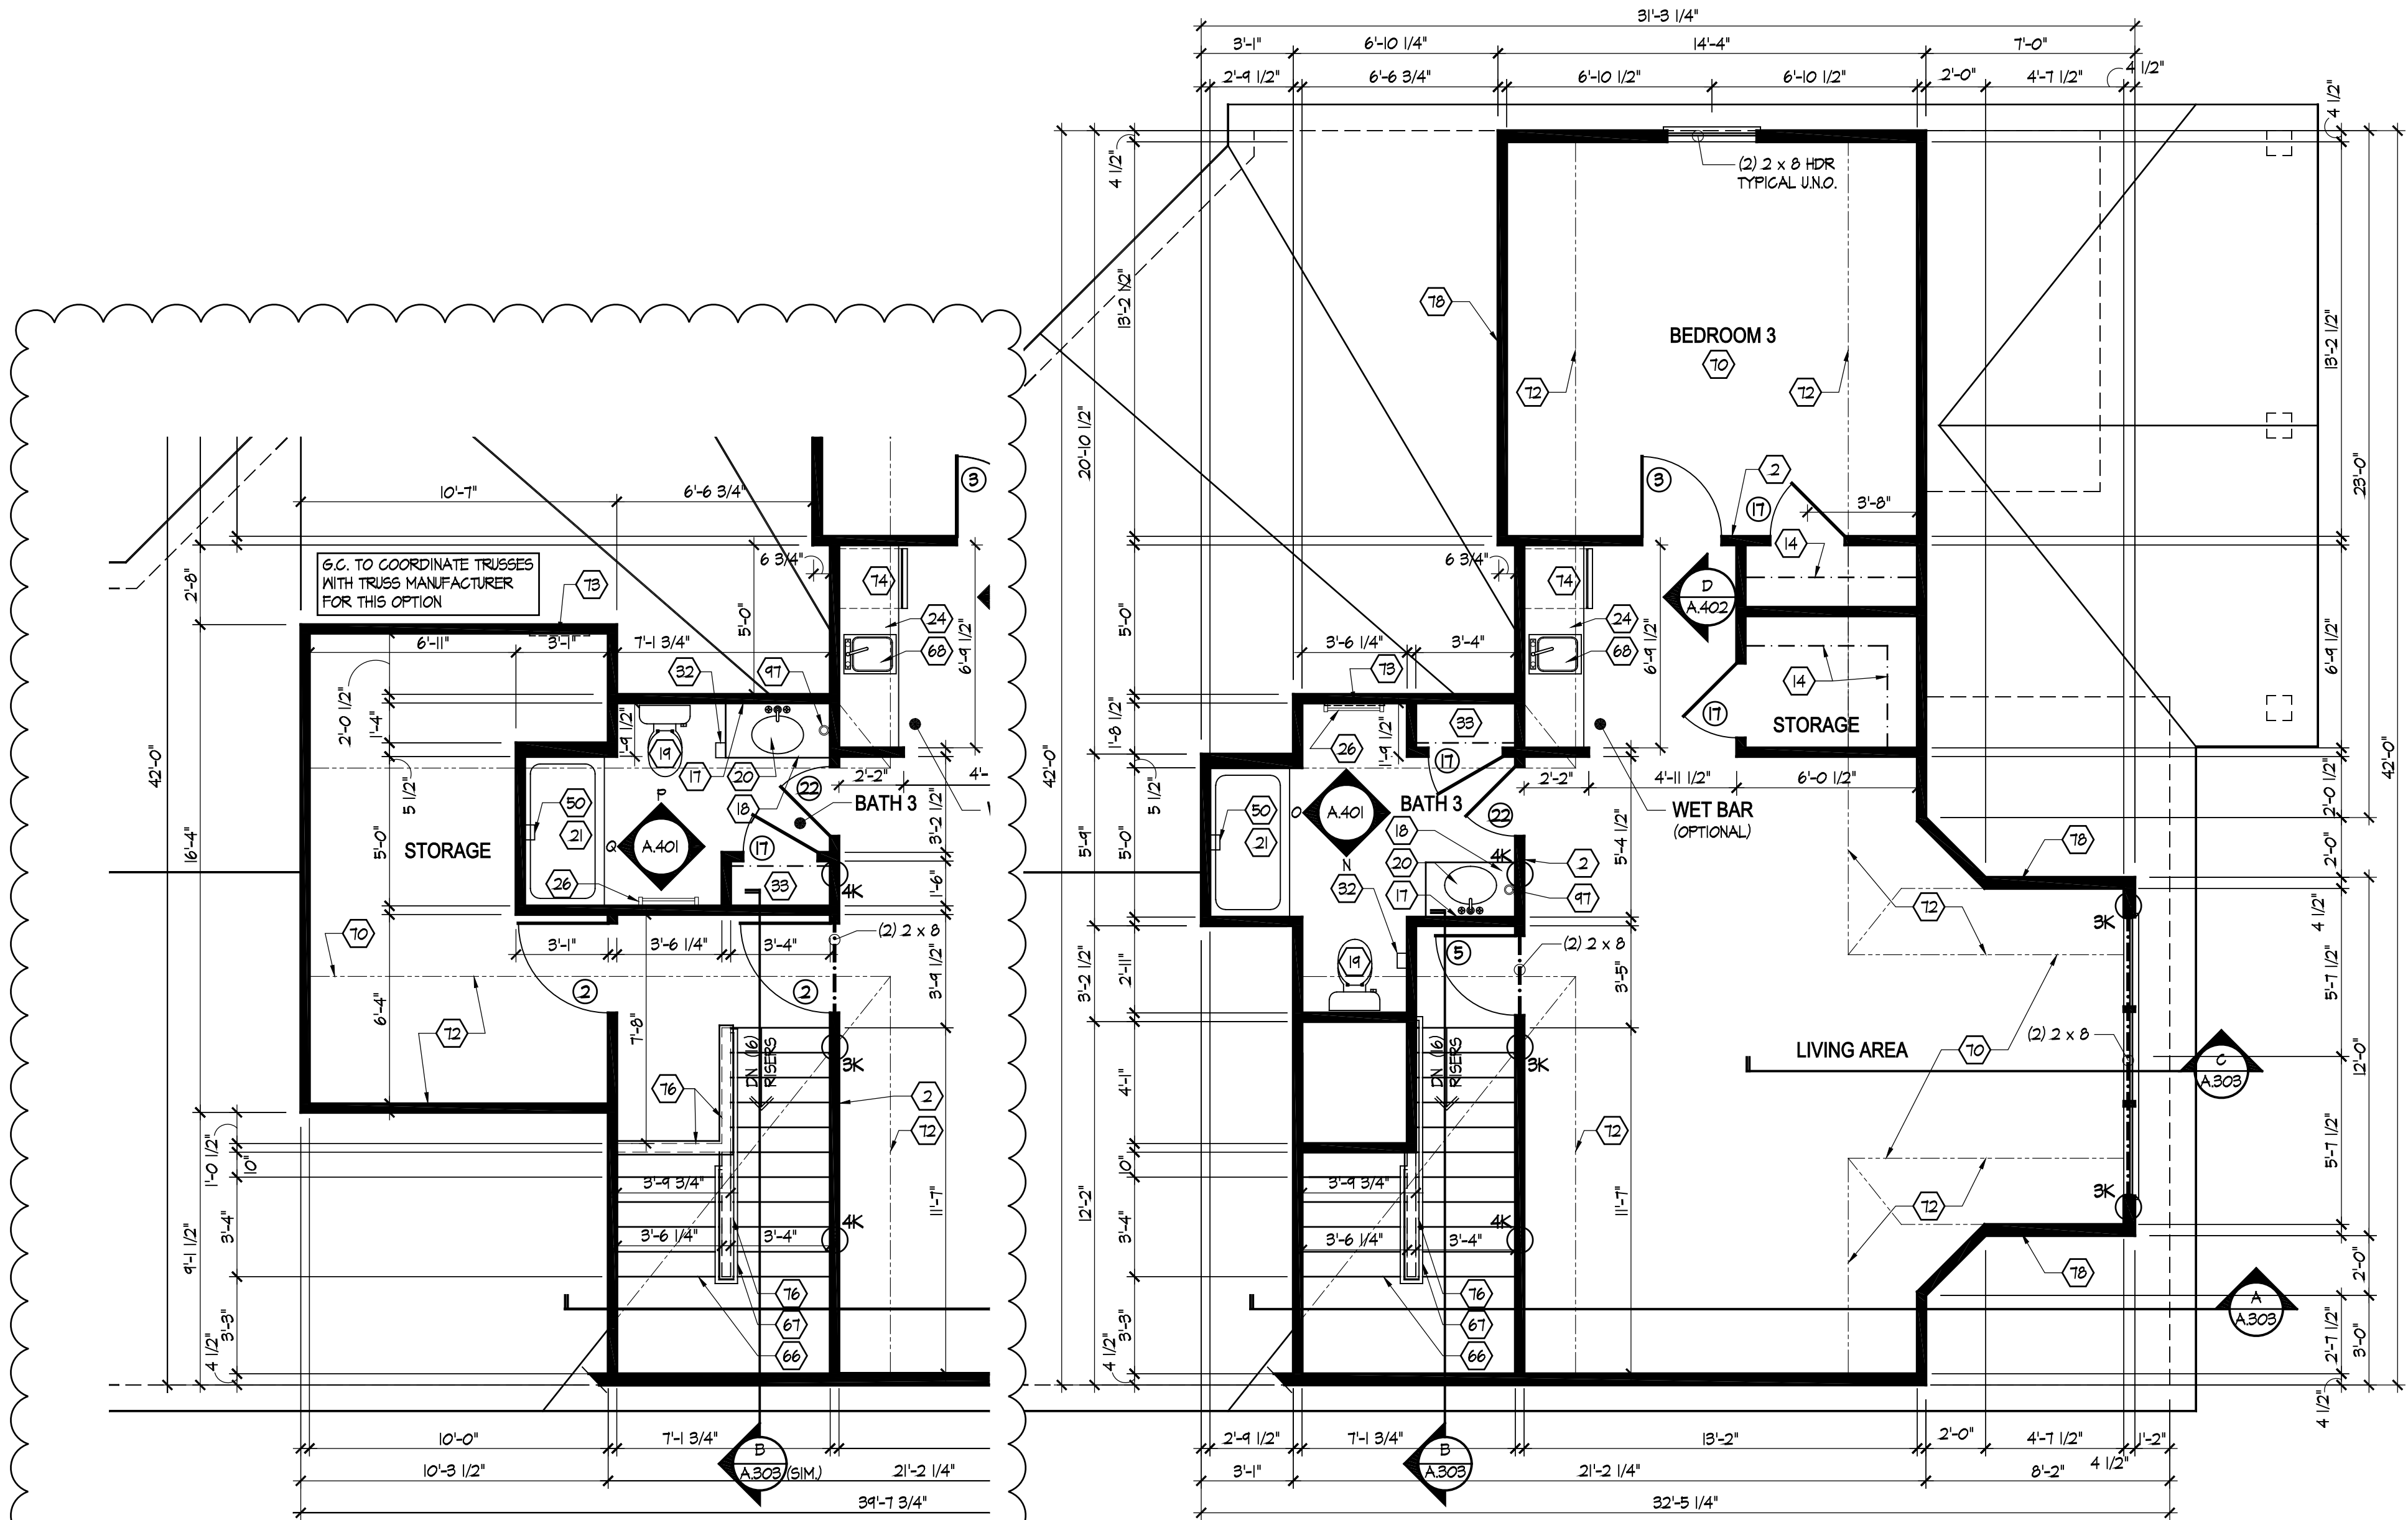

Second Floor Plan - Elev A


Scale: 1/4" = 1'-0"

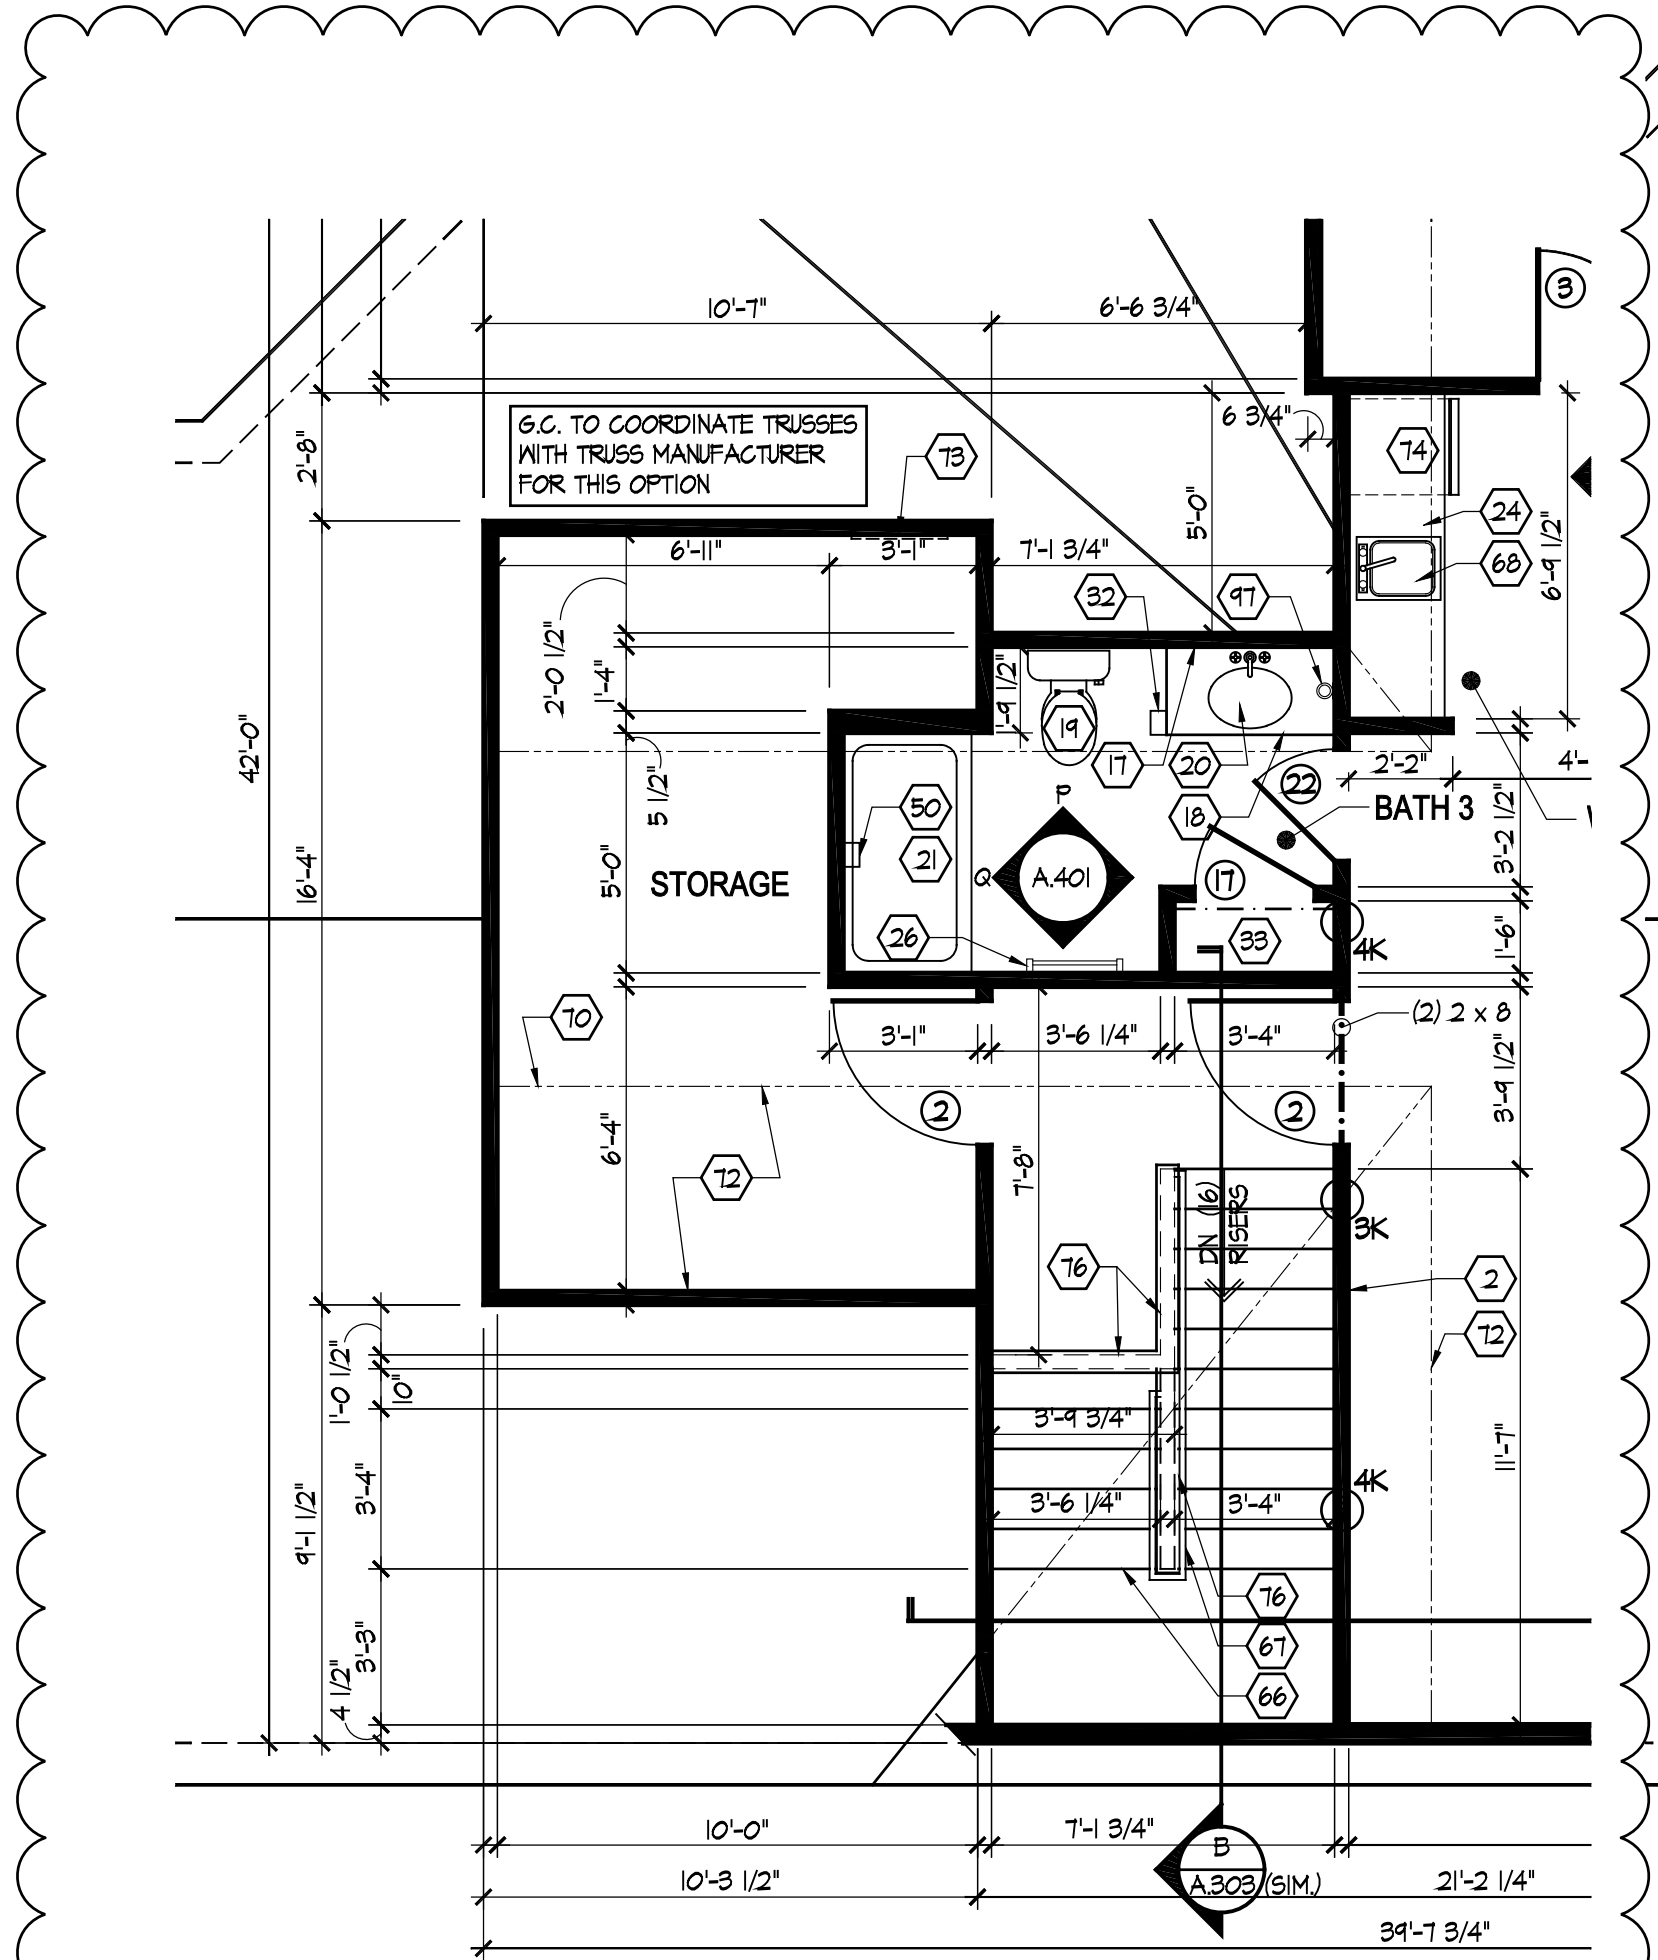

Second Floor Plan - Additional Storage Option

Scale: 1/4" = 1'-0"

YES

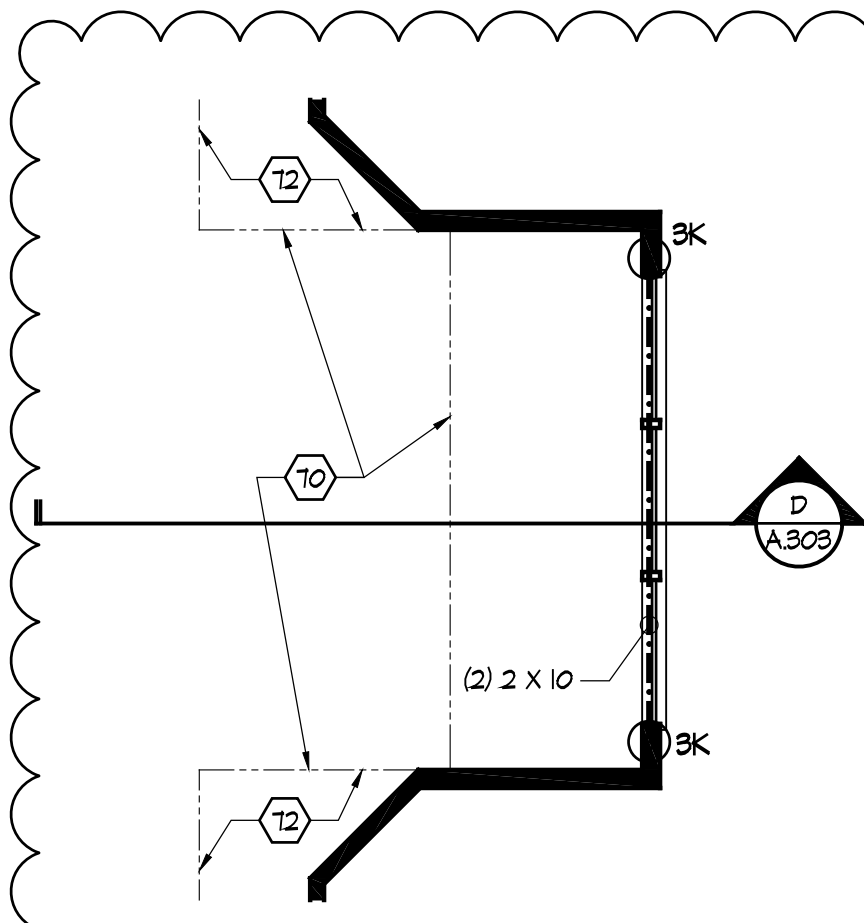

Dormer - Elev B

Scale: 1/4" = 1'-0"

YES

PROPRIETARY RIGHTS NOTICE
COPYRIGHT 2007 EPCON COMMUNITIES FRANCHISING, INC.
ALL RIGHTS ARE RESERVED IN THIS INFORMATION AND ALL RELATED ILLUSTRATIONS, PLANS, BLUEPRINTS, SKETCHES, DRAWINGS, OR ANY OTHER TANGIBLE EXPRESSIONS THEREOF, WHICH ARE THE PROPERTY OF EPCON COMMUNITIES FRANCHISING, INC., 500 STONEHENGE PARKWAY, DUBLIN, OHIO 43017, TELEPHONE 614-862-3507. NO ONE MAY BUILD, LICENSE, TRANSFER, REPRODUCE OR DUPLICATE THIS WORK IN ANY WAY WITHOUT THE WRITTEN AUTHORIZATION OF EPCON COMMUNITIES FRANCHISING, INC.
THESE DRAWINGS SHALL BE USED IN CONFORMANCE WITH ALL LOCAL BUILDING, MECHANICAL, PLUMBING AND ELECTRICAL CODES AND SHALL MEET THE REQUIREMENTS OF THE HEALTH DEPARTMENT, FIRE MARSHALL, AMERICANS WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES (ADAAG), THE FAIR HOUSING ACT ACCESSIBILITY GUIDELINES (FHAG), AND SHALL BE CONSTRUCTED IN CONFORMANCE WITH STATE AND LOCAL ENERGY REQUIREMENTS.





Prototype Disk No.	Interim Revision	Page Revisions Date
		8/10/20

Architect Project Number
2019-044


Community Dates & Revisions	
Date Originated	20 DEC 2019
Bid	
Permit	
Construction	

Revisions	
▲	▲
▲	▲
▲	▲

Drawing Title
Extended Master Suite
Plans and Electrical

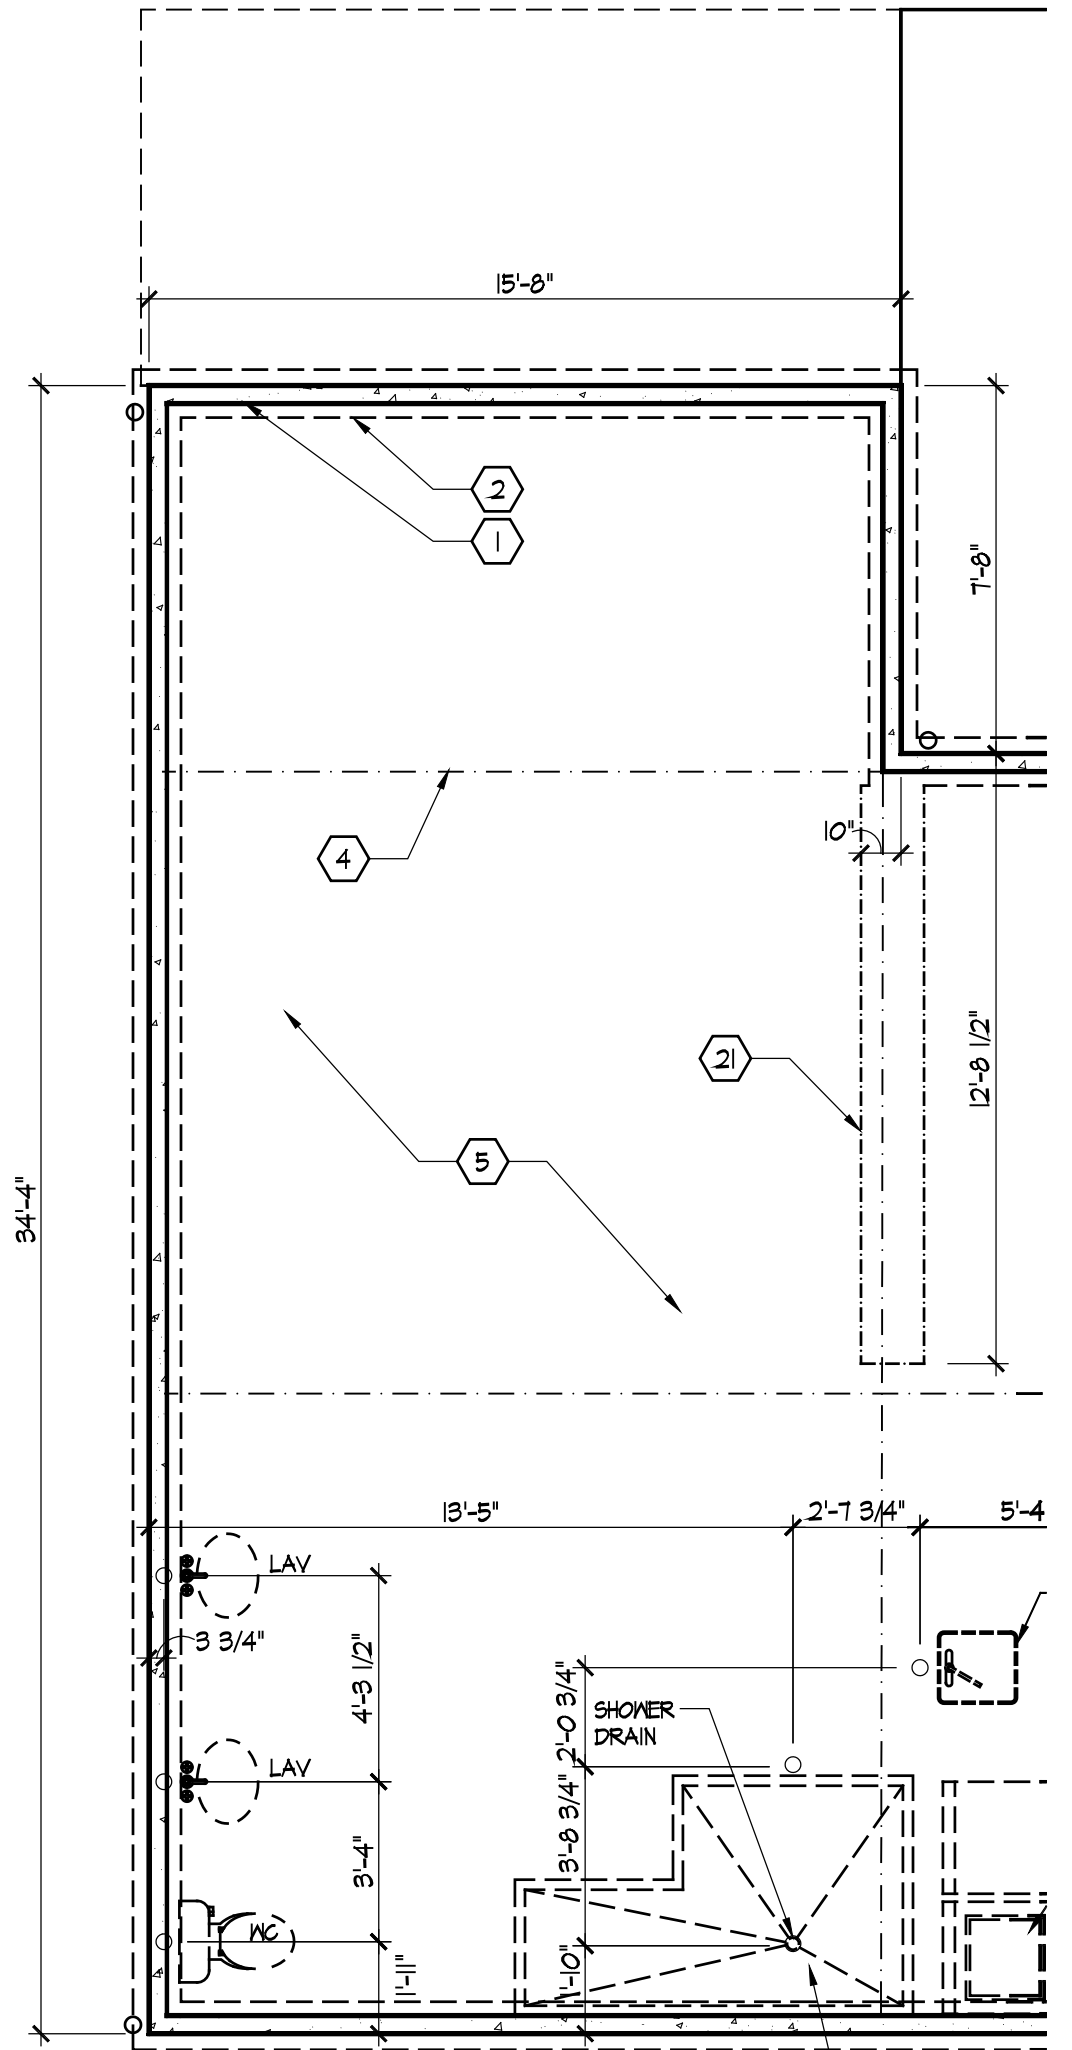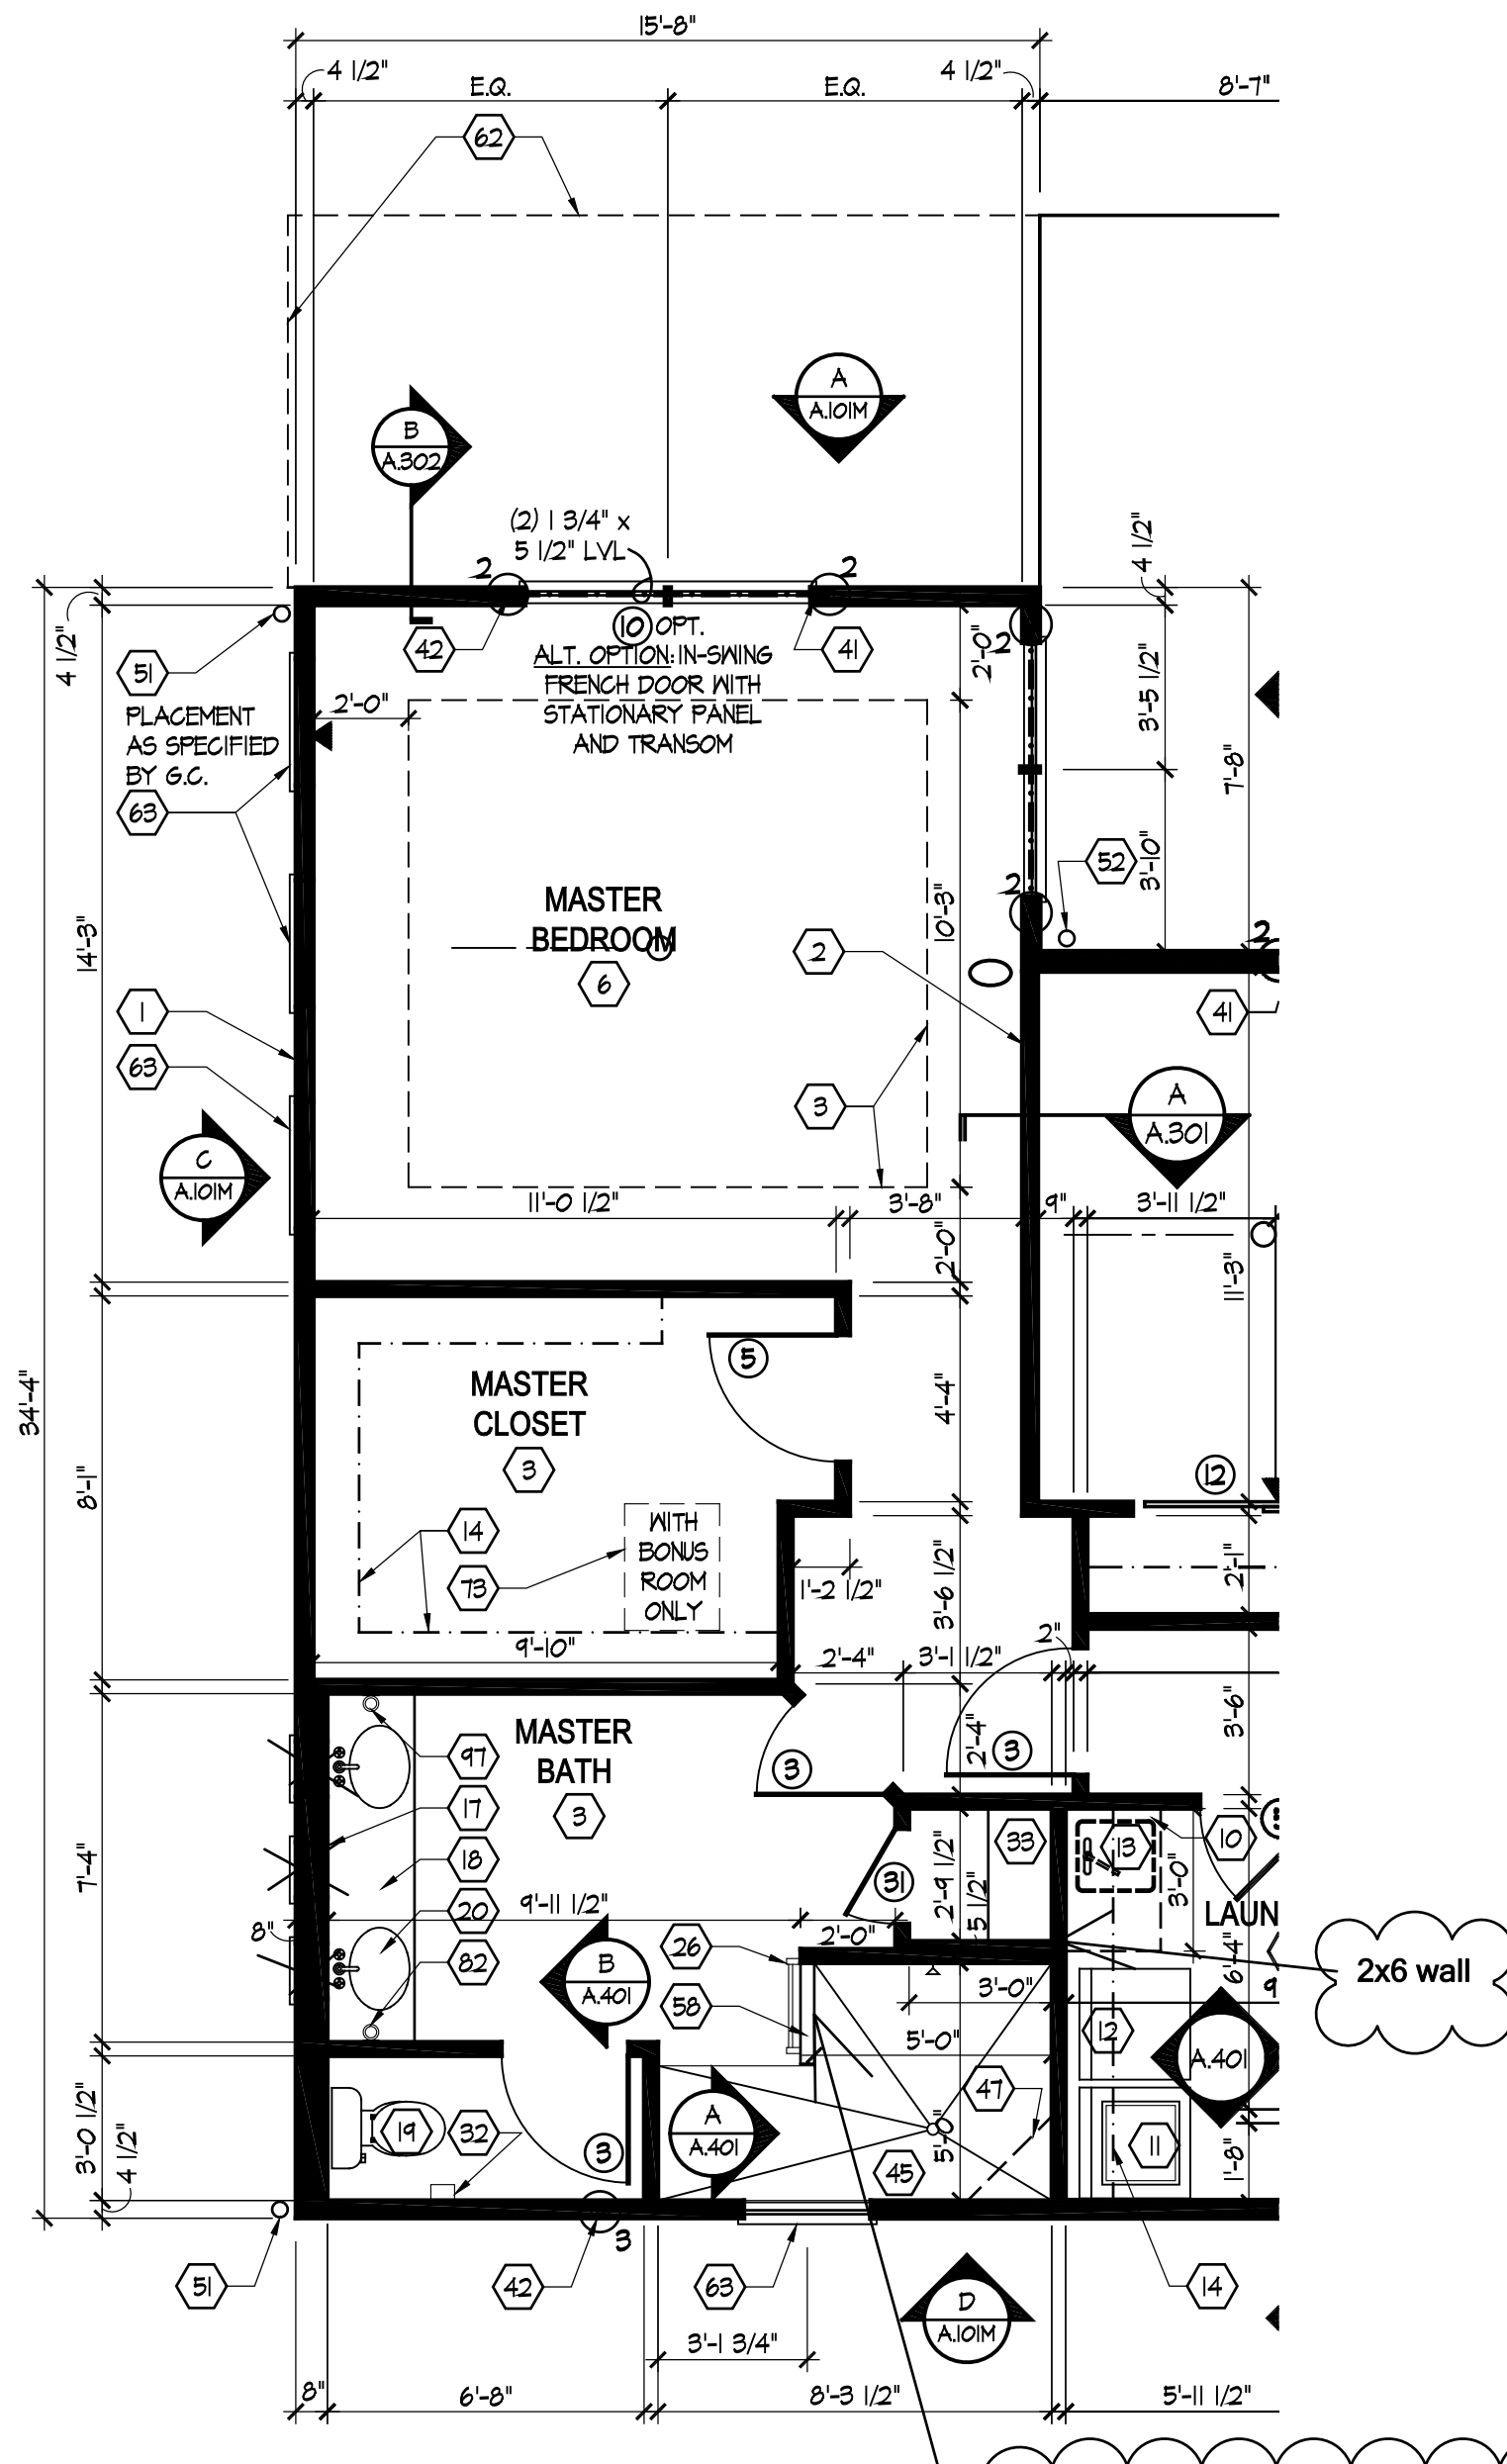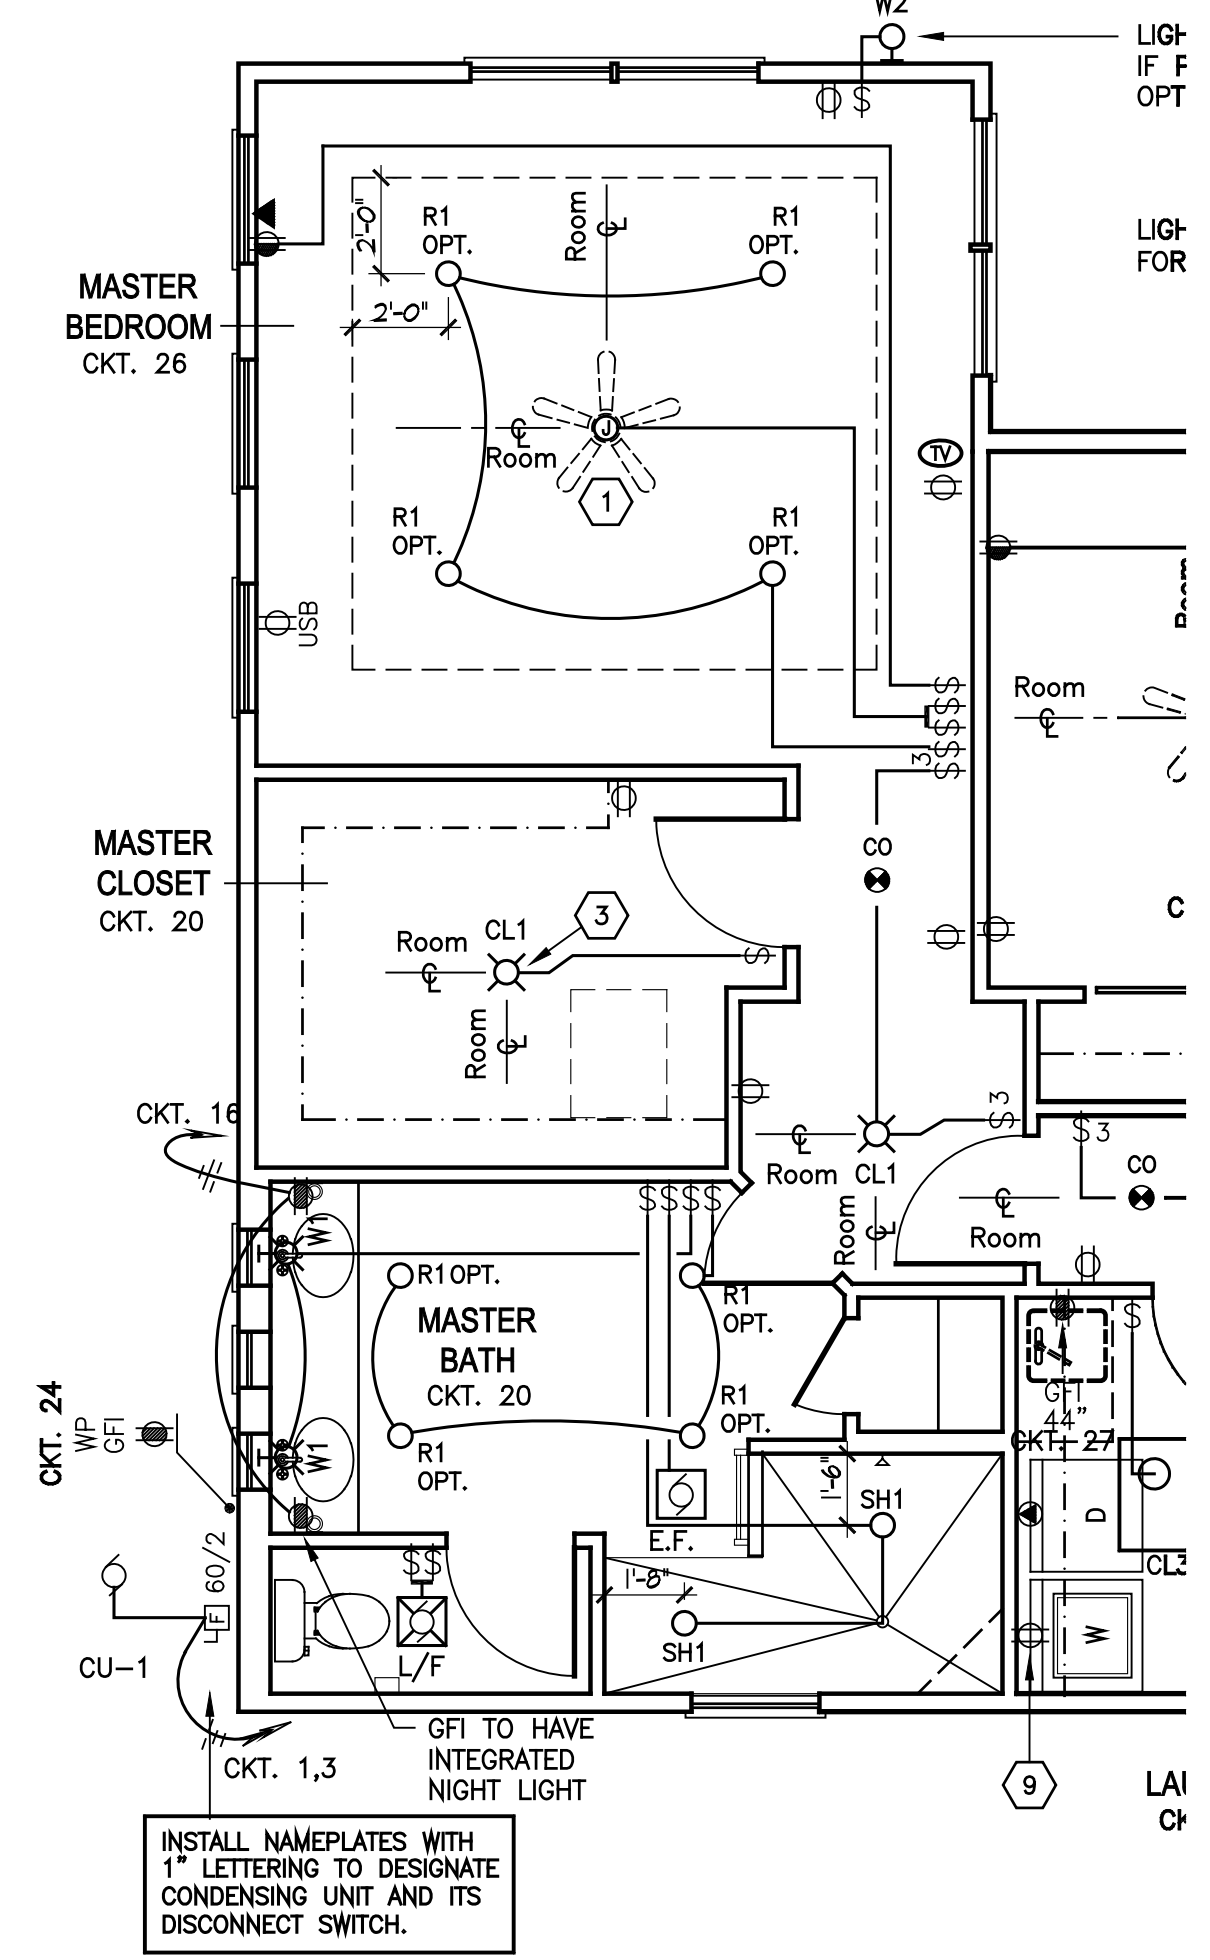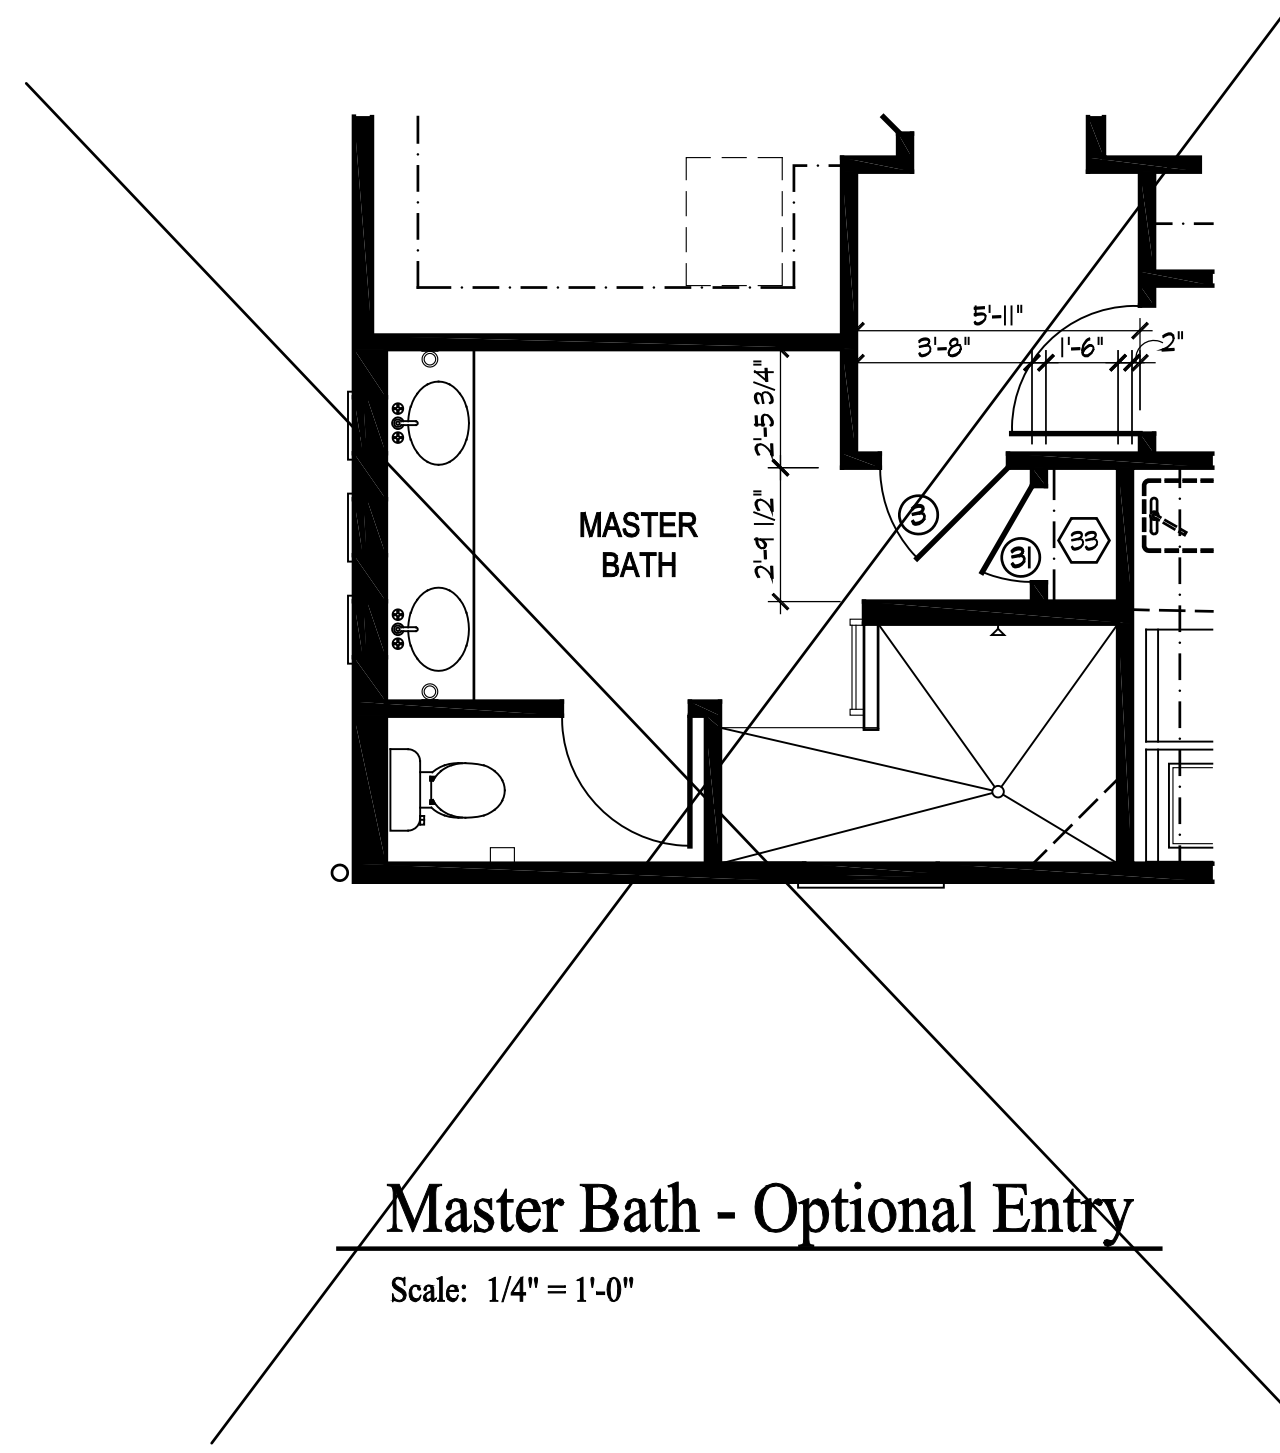


locate std stud cavity in center of this wall to accomodate storage niche

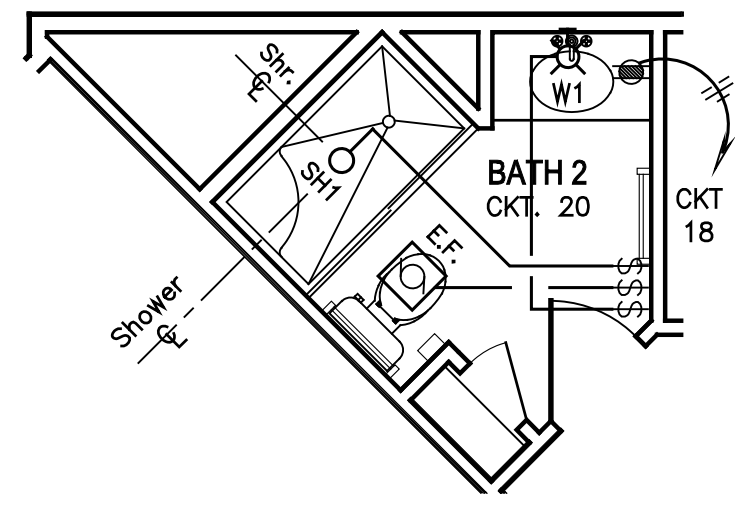


Bath 2 - Optional Shower w/ Built-in Seat

Scale: 1/4" = 1'-0"

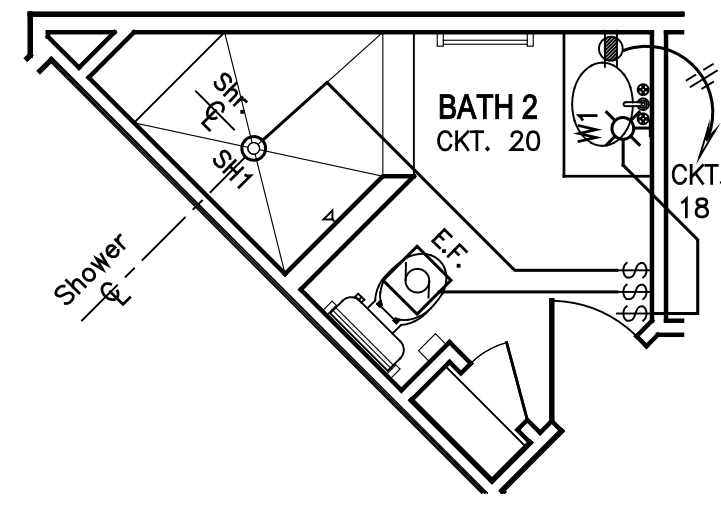


Bath 2 - Optional Walk-in Shower

Scale: 1/4" = 1'-0"

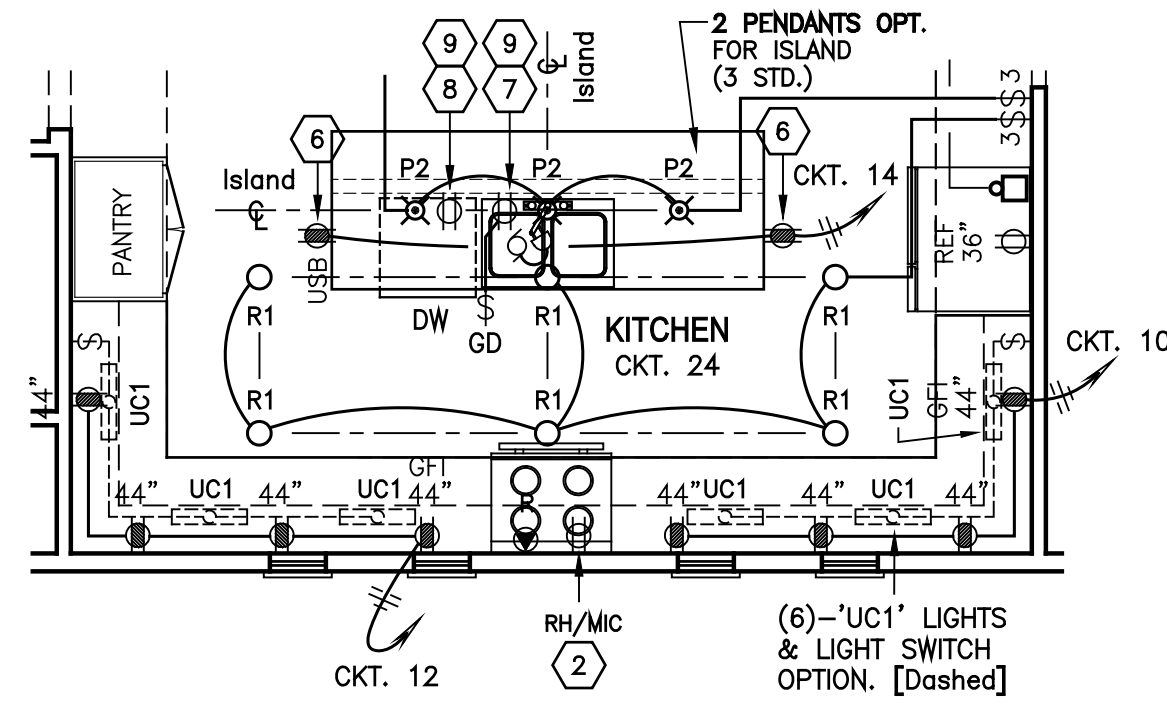


Kitchen - Extended Option

Scale: 1/4" = 1'-0"

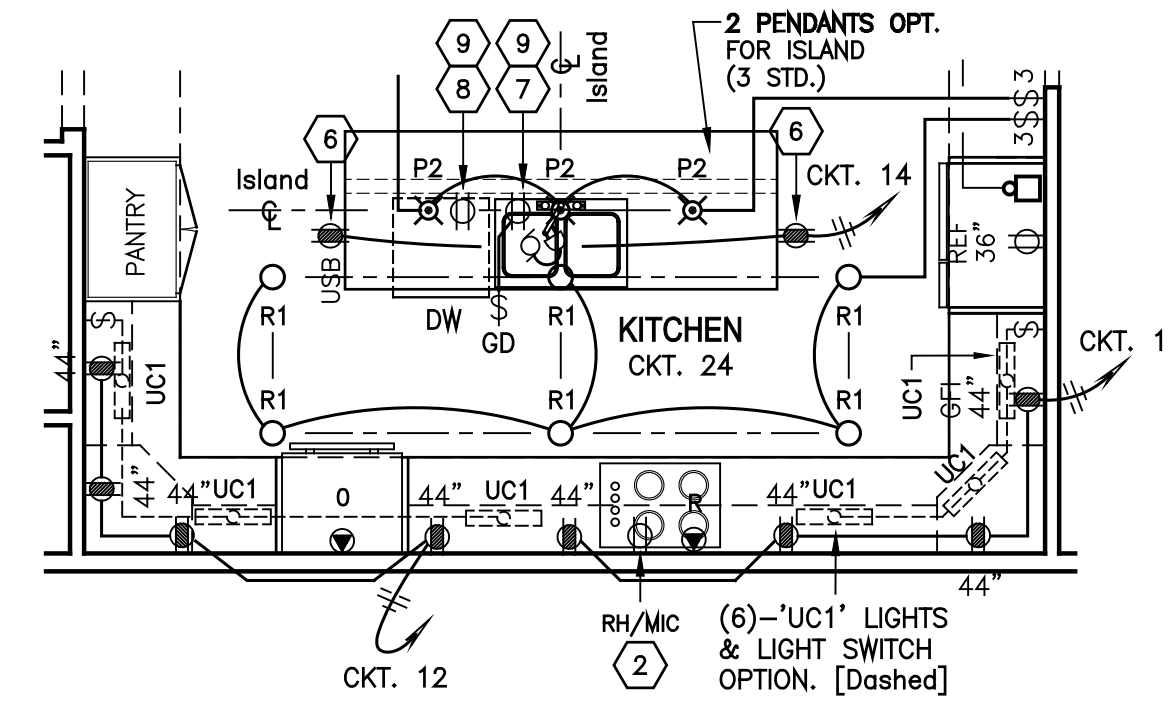


Kitchen - Extended Deluxe Option

Scale: 1/4" = 1'-0"

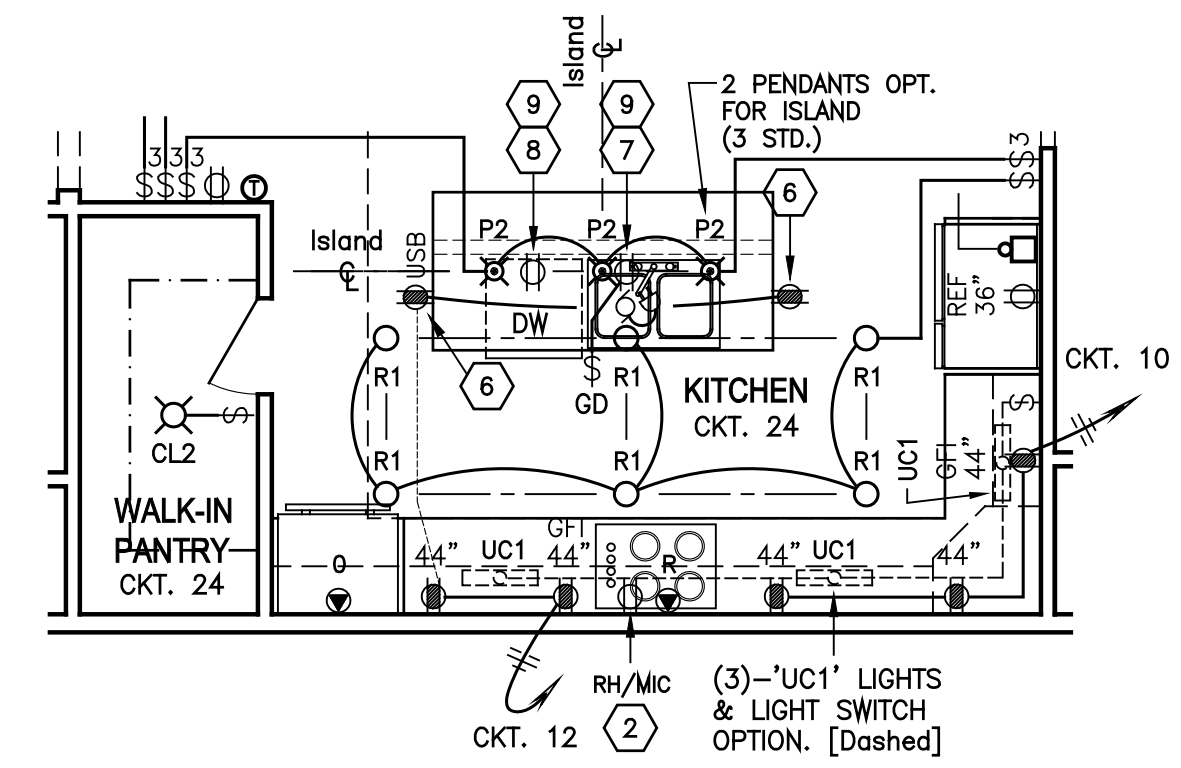


Kitchen - Deluxe Option

Scale: 1/4" = 1'-0"

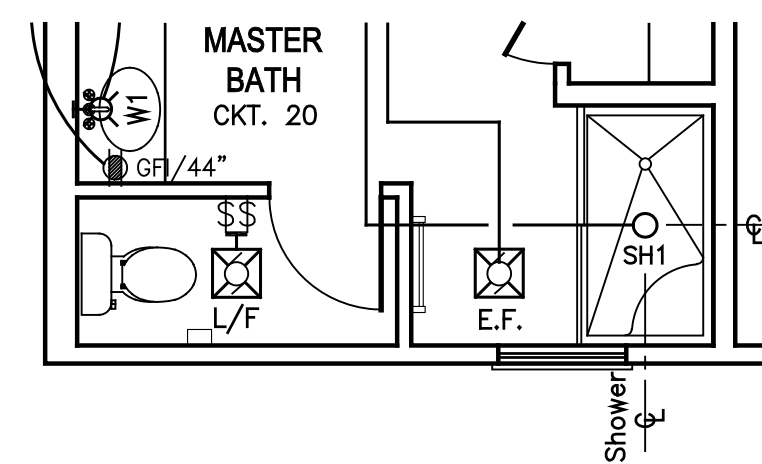


Master Bath - Optional Shower w/ Built-in Seat

Scale: 1/4" = 1'-0"

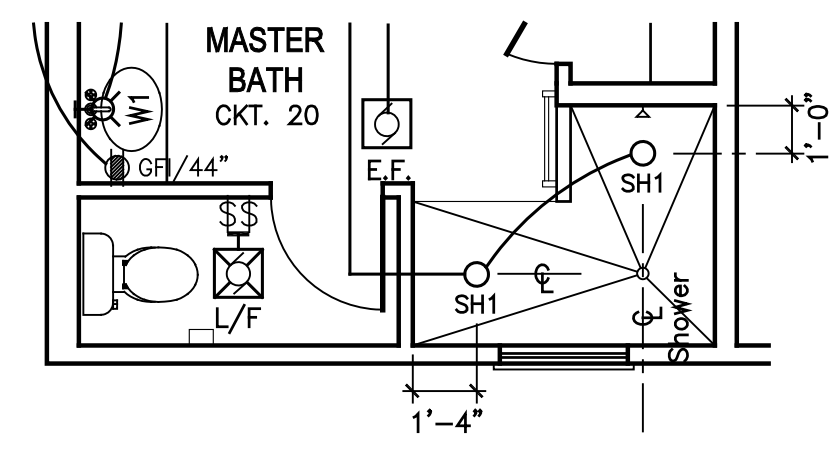


Master Bath - Optional Walk-in Shower

Scale: 1/4" = 1'-0"

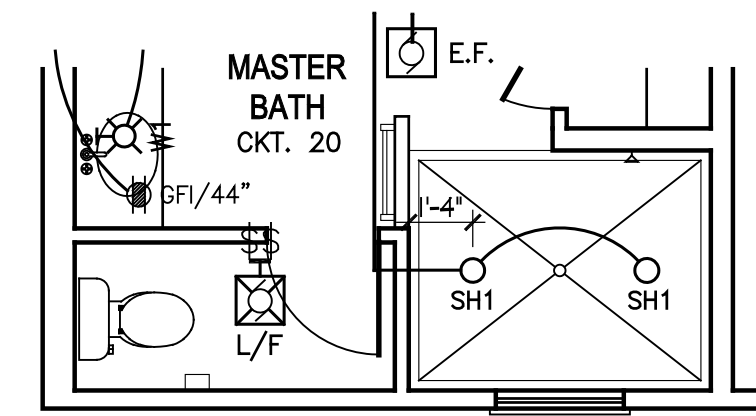


Master Bath - Optional Zero Threshold Shower

Scale: 1/4" = 1'-0"

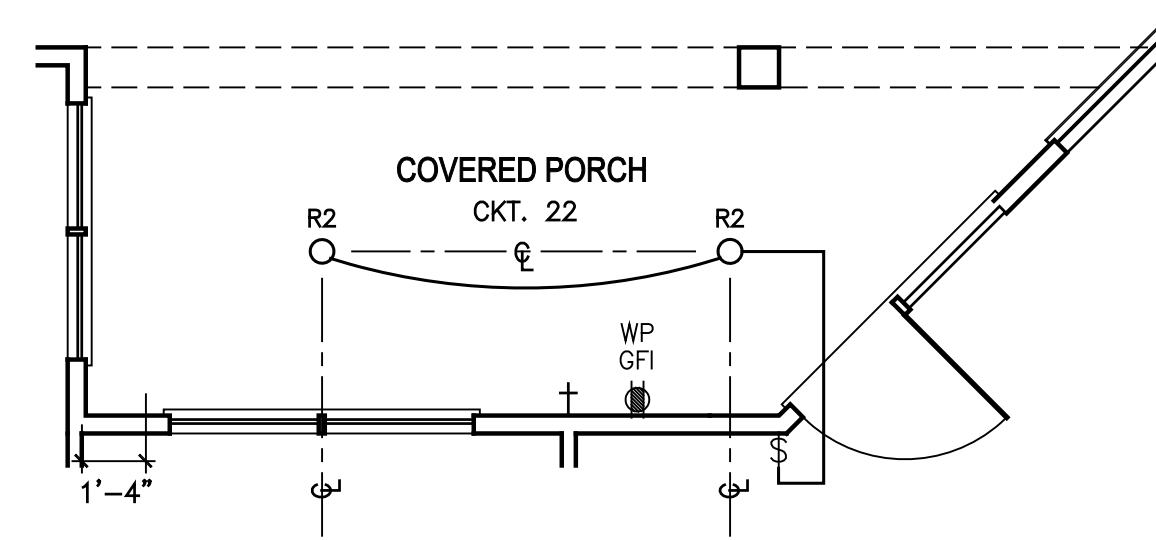

Courtyard - Covered Porch Option

Scale: 1/4" = 1'-0"

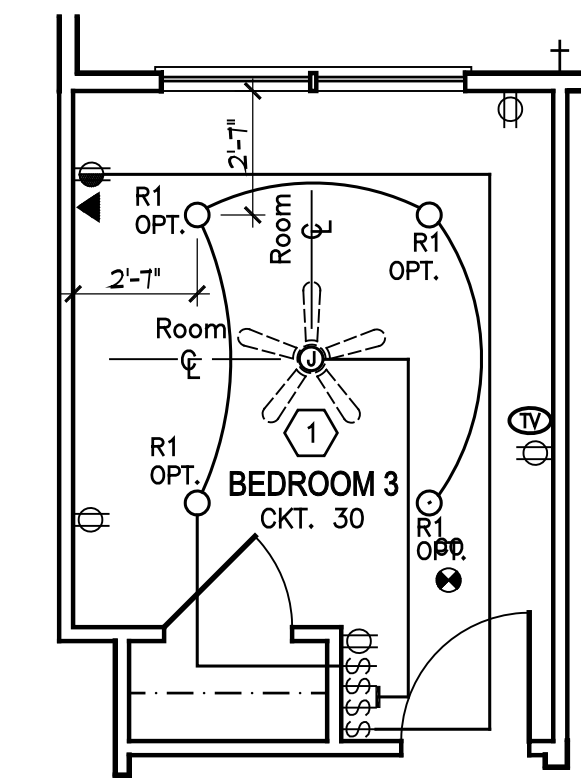

Bedroom 3 Option

Scale: 1/4" = 1'-0"



Foundation Development
Group, LLC & Bel Haven, LLC
Bel Haven
Beckett Road
West Chester, Ohio 45069

PROPRIETARY RIGHTS NOTICE
COPYRIGHT 2007 EPCON COMMUNITIES FRANCHISING, INC.
ALL RIGHTS ARE RESERVED IN THIS INFORMATION AND ALL RELATED ILLUSTRATIONS, PLANS, BLUEPRINTS, SKETCHES, DRAWINGS, OR ANY OTHER TANGIBLE EXPRESSIONS THEREOF, WHICH ARE THE PROPERTY OF EPCON COMMUNITIES FRANCHISING, INC., 500 STONEHENGE PARKWAY, DUBLIN, OHIO 43017, TELEPHONE (614) 552-3327. NO ONE MAY BUILD, LICENSE, TRANSFER, REPRODUCE OR DUPLICATE THIS WORK IN ANY WAY WITHOUT THE WRITTEN AUTHORIZATION OF EPCON COMMUNITIES FRANCHISING, INC.
THESE DRAWINGS SHALL BE USED IN CONFORMANCE WITH ALL LOCAL BUILDING, MECHANICAL, PLUMBING AND ELECTRICAL CODES AND SHALL MEET THE REQUIREMENTS OF THE HEALTH DEPARTMENT, FIRE MARSHALL, AMERICANS WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES (ADAAG), THE FAIR HOUSING ACT ACCESSIBILITY GUIDELINES (FHAG), AND SHALL BE CONSTRUCTED IN CONFORMANCE WITH STATE AND LOCAL ENERGY REQUIREMENTS.

Prototype Disk No.	Interim Revision	Page Revisions Date
		6/21/18

Architect Project Number

Community Dates & Revisions	
Date Originated	20 DEC 2019
Bid	
Permit	
Construction	
Revisions	
△	△
△	△
△	△

Drawing Title
Electrical Plan

Architectural Style
European Country
Sheet Number
E.101A
D4 Bonus - 2017