


2x8 LEDGER THRU
BOLTED, w/ 1/4" CARRIAGE
BOLTS STAGG. @ 24" O.C.

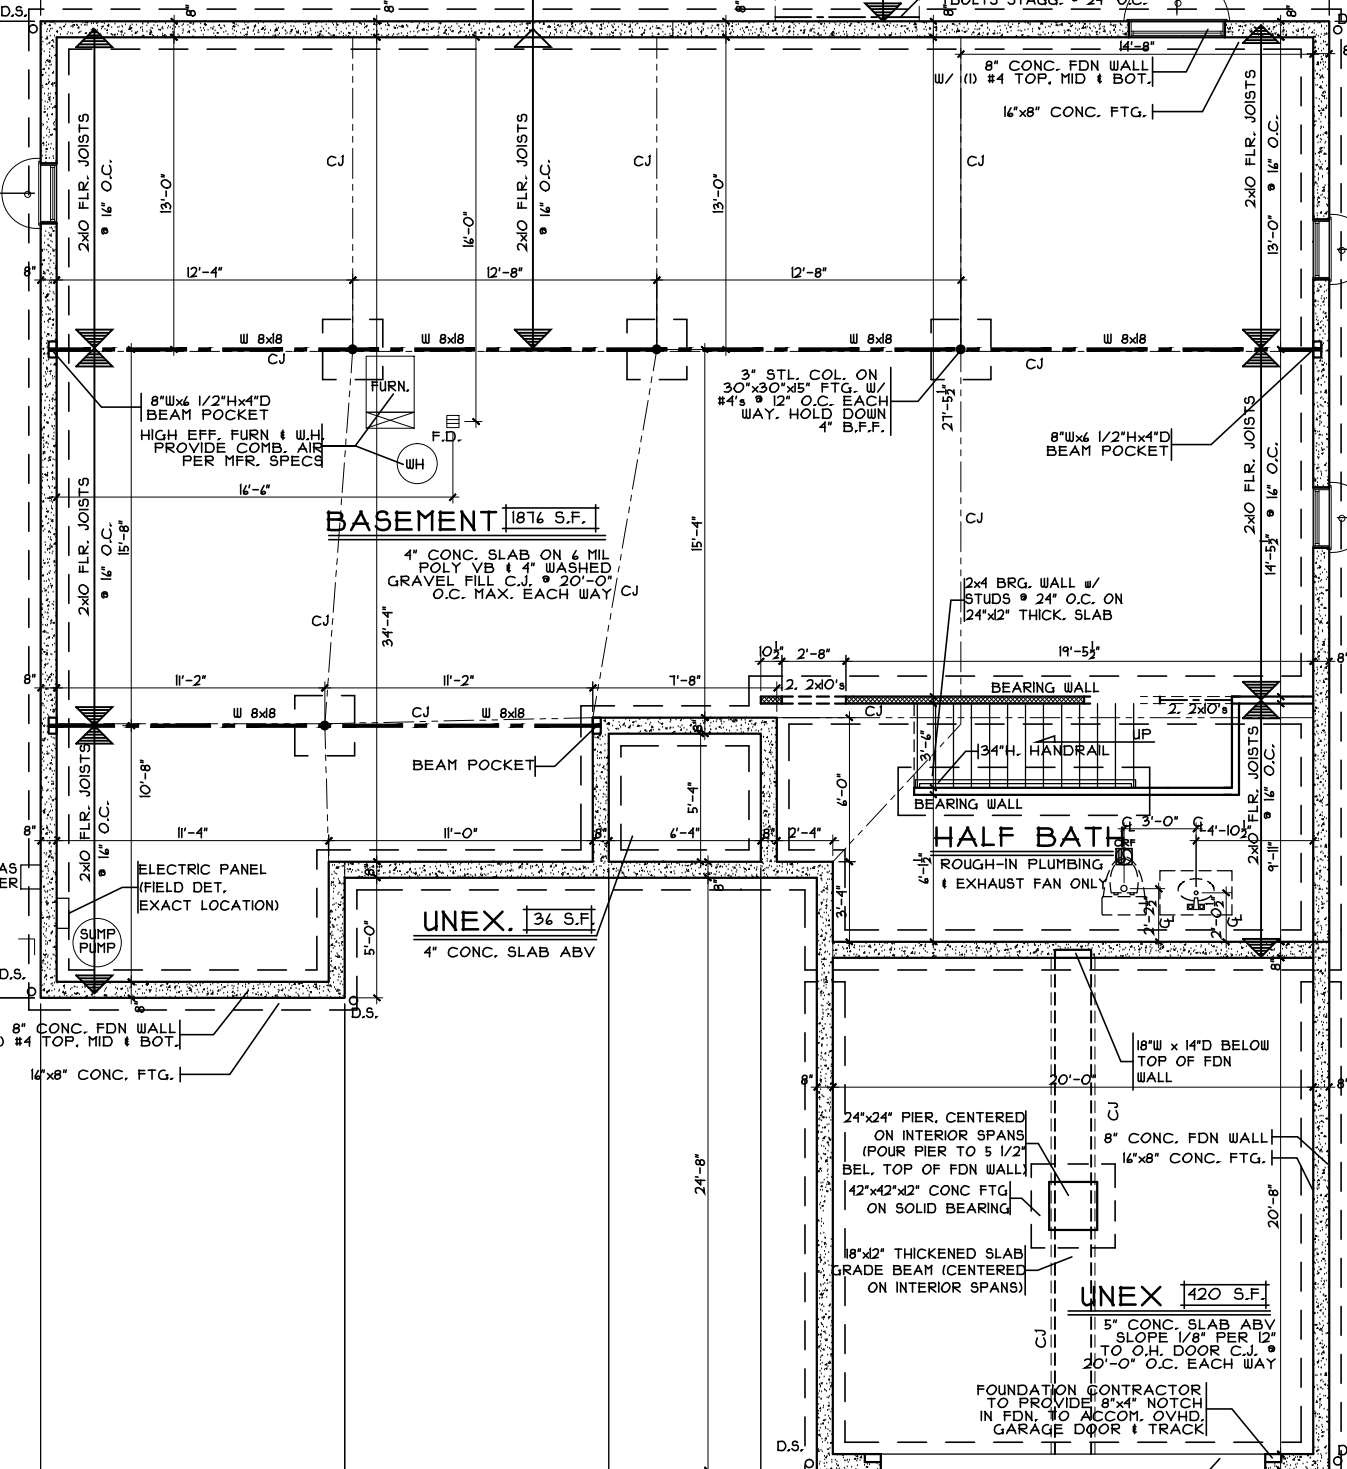

BASEMENT 1876 S.F.

4" CONC. SLAB ON 4 MIL
POLY VB & 4" WASHED
GRAVEL FILL C.J. @ 20'-0"
O.C. MAX. EACH WAY

UNEX. 36 S.F.

4" CONC. SLAB ABV

HALF BATH

ROUGH-IN PLUMBING
& EXHAUST FAN ONLY

UNEX 420 S.F.

5" CONC. SLAB ABV
SLOPE 1/8" PER 12"
TO O.H. DOOR C.J. @
20'-0" O.C. EACH WAY

FOUNDATION CONTRACTOR
TO PROVIDE 8"x4" NOTCH
IN FDN. TO ACCOM. OVHD.
GARAGE DOR & TRACK

HOLD DN, T.O.W.
12" BEL. TOP OF

8" CONC. FDN WALL
(1) #4 TOP, MID & BOT.

16" x 8" CONC. FTG.

ELECTRIC PANEL
(FIELD DET.
EXACT LOCATION)

SUMP PUMP

GAS
TER

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

D.S.

